




Version 5.3.2

01.11.2012 /

:

(Standard)

HSN7471-75
 R404A
 " " "
 T " SST -25°C
 SCT 45°C
 Standard
 .(.) 0K
 t 80°C
 . 10K
 . 100%
 - 400V-3-50Hz
 - 100%

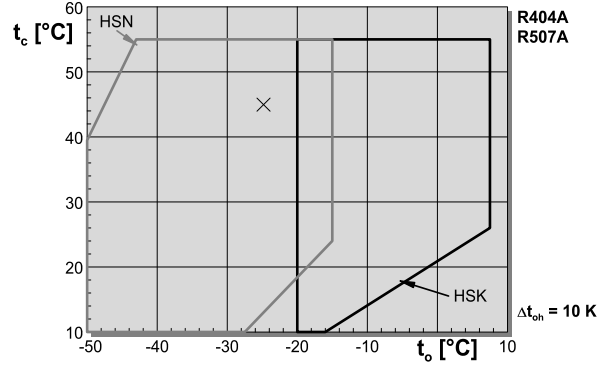

HSN7471-75-40P

-		65.9 kW
- *		65.9 kW
-		65.9 kW
.		56.7 kW
(400V)		90.6 A
		380-415V
-		113.4 kW
/		1.16
/ *		1.16
.	LP	2564 kg/h
.	HP	2564 kg/h
		Standard
.		44.7 °C
.		2.03 m/h
-		71.3 °C
-		9.17 kW
.		89.0 °C



- ASERCOM

/ (. + .)

* EN12900 (10K , 0K)