




Version 5.3.2

01.11.2012 /

:

(ECO)

HSN7471-75
 R404A
 SST -25°C
 SCT 45°C
 ECO
 Auto
 80°C
 10K
 100%
 400V-3-50Hz
 100%

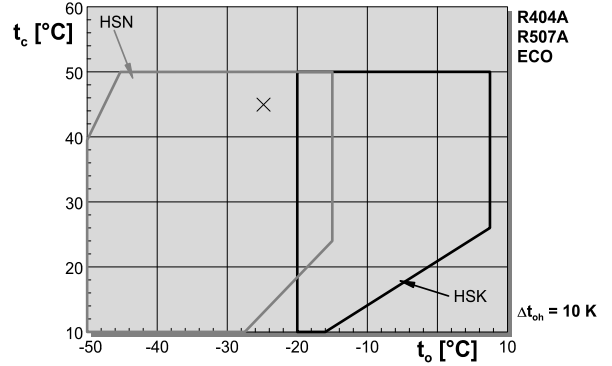

HSN7471-75-40P

-	95.0 kW
- *	97.9 kW
-	95.0 kW
.	67.0 kW
(400V)	106.1 A
-	380-415V
-	154.7 kW
/	1.42
/ *	1.45
.	LP 2564 kg/h
.	HP 3499 kg/h
	ECO
.	- (-) 18.92 °C
.	935 kg/h
-	29.1 kW
.	ECO 8.92 °C
ECO-	7.94 bar(a)
.	2.03 m/h
-	73.1 °C
-	7.28 kW
.	84.3 °C

* EN12900 (10K
 5K)