



Version 5.3.2

01.11.2012 /


:

(Standard)

T " SST -45°C  
 SCT 45°C  
 Standard  
 t .( .) 0K  
 80°C  
 10K  
 100%  
 400V-3-50Hz  
 - 100%

**HSN7471-75**

R404A

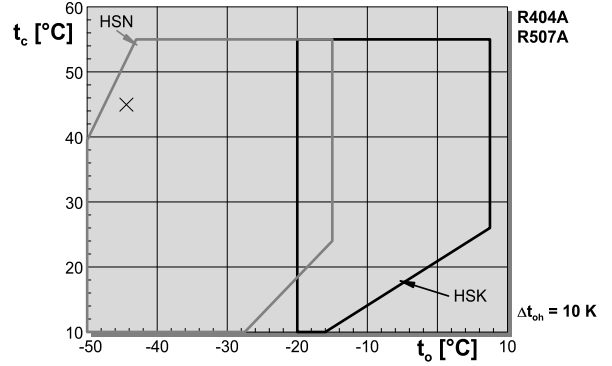

**HSN7471-75-40P**

-		21.9 kW
-	*	21.9 kW
-		21.9 kW
.		46.4 kW
(400V)		75.2 A
		380-415V
-		43.6 kW
/		0.47
/	*	0.47
.	LP	985 kg/h
.	HP	985 kg/h
		Standard
.		44.7 °C
.		2.12 m/h
-		57.3 °C
-		24.7 kW
.		156.5 °C



- ASERCOM

/ ( . + . )

\* EN12900 (10K , 0K )