




Version 5.3.2

01.11.2012 /

:

(ECO)

		HSN7471-75
		R404A
T	"	"
	SST	-45°C
	SCT	45°C
		ECO
t	(Auto
		80°C
		10K
		100%
		400V-3-50Hz
	-	100%

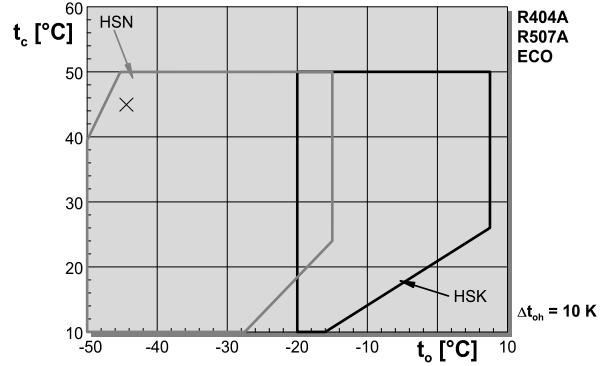

HSN7471-75-40P

	-	40.5 kW
	- *	41.9 kW
	-	40.5 kW
	.	56.8 kW
(400V)		90.8 A
		380-415V
	-	72.8 kW
/		0.71
/ *		0.73
.	LP	985 kg/h
.	HP	1647 kg/h
		ECO
.	- (-)	-0.12 °C
.		661 kg/h
-	-	18.64 kW
.	ECO	-10.12 °C
ECO-		4.32 bar(a)
.		2.12 m/h
	-	57.4 °C
-	-	24.6 kW
.		124.6 °C

* EN12900 (10K 5K) / (. + .)