



Savings, Performance, 3 Technologies

NEW SILENSYS®

Silence to meet
your highest expectation



Tecumseh



Cooling for a Better Tomorrow™



SILENSYS®

The first condensing unit which combines **silence and performance**, available in **3 technologies**.

The only manufacturer to master the 3 compressor technologies.



PISTON

Tecumseh proven compressor technology. Reliability and robustness characterize these reciprocating compressors. Tecumseh continues to lead the way by designing energy efficiency, quiet operation and reliability into every new reciprocating compressor we produce.



ROTARY

Rotary technology ensures optimum performance especially for small cooling capacities. This compressor technology allows energy saving (due to reduced electrical input power on a large evaporation range) and a low acoustic level with a small footprint. Ideally suited for demanding applications, its design gives it great strength.



SCROLL

Scroll technology ensures high efficiency for medium and high cooling capacities regardless of the operating regime. This technology allows significant energy savings and is ideal for demanding applications. Its design gives it great resistance to liquid flooding.

SILENSYS®, a range of cutting edge products

With 50 years of experience in the refrigeration industry, world leader Tecumseh develops and devises high performance condensing unit solutions.

Tecumseh continues to innovate and launches in 2011 three new Silensys® condensing unit ranges.



SILENSYS®, an innovative idea, French designed and manufactured

MADE IN FRANCE

Tecumseh Europe's R&D department and accredited laboratory guarantee performance levels and validated improvements.

This level of excellence is recognized by the leading accreditation and certification bodies:

- Laboratory COFRAC accreditation
- Compressor performance ASERCOM certification.




Silensys®'s benefits

Acoustics

Silensys®, the ultra silent range, remains the acoustic reference on the market.

Decrease in sound power is
at least 50% on S, M and L [-3 dB(A)]
and **75% on size XL** [-6 dB(A)].



Energy efficiency

The Reciprocating range has been supplemented by two "High Efficiency" (HE) ranges, which integrate the new Rotary and Scroll compressors. With the addition of EC fan (motors) on some models Tecumseh further meets the needs to reduce energy consumption.

Coefficient of Performance (COP) improvement

- **Reciprocating technology:**
on average +5%
- **Scroll technology:**
on average +15%
- **Rotary technology:**
on average +20%

Robustness and reliability

French made Silensys® condensing units are manufactured with **high quality components**. Silensys® is designed to operate in a wide range of environments, including those with high ambient temperatures.



Installation and maintenance

Contents and functions of the new condensing units have been upgraded **in order to ease installation and maintenance**. Safety aspects have also been improved.




SILENSYS® RANGE

ACOUSTICS

And the silence is

- 1 New fan blade design geometry
- 2 Added foam within the cover to encapsulate noise
- 3 Air flow optimization by adding a buffer around the fan
- 4 Noise transmission is further limited by the lateral double skin plastic door
- 5 Redesigned metal door frame for increased overall stiffness and reduced vibration
- 6 Discharge muffler line reduces the pulsations (depending on model)
- 7 Specific pipe-bending to reduce and absorb cooling circuit vibrations

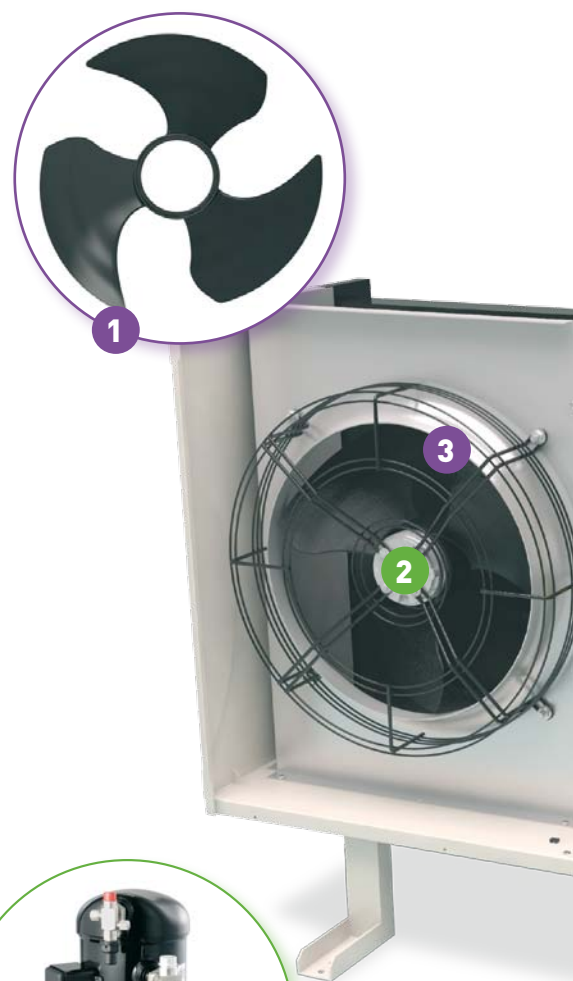

ENERGY EFFICIENCY

Friendly power


- 1 Reduced electrical input power with Rotary and Scroll technologies due to higher volumetric efficiency
- 2 Improved AC fan performance with permanent capacitor for S size
- 3 Fan speed regulator direct mounted on 3-way valve (or liquid receiver)



Rotary compressor



Scroll compressor

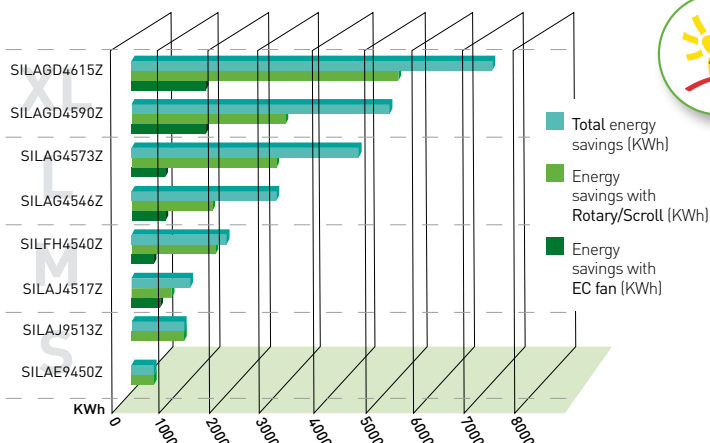

- In a condensing unit compressor power largely determines in the total power consumption
- Tecumseh has anticipated the Energy related Product (ErP) 2013/2015 directive requirements which sets minimum efficiency numbers for EC fans (permanent magnet motor)
- Digital controller on XL Scroll Silensys® for multiple evaporator capability
- Silensys®' condensers are devised to operate in High Ambient Temperature




What's new?

ROBUSTNESS & RELIABILITY

Built to last

- 1 Oil management: Silensys® ranges (Rotary, Reciprocating and Scroll) are equipped with an oil separator
- Check valve on cooling circuit for rotary compressors
- Oil equalization piping between 2 compressors (Silensys® DUO)
- IP44 Electrical Protection Class (resistant to water spray)
- Corrosion and UV-resistant condensing unit

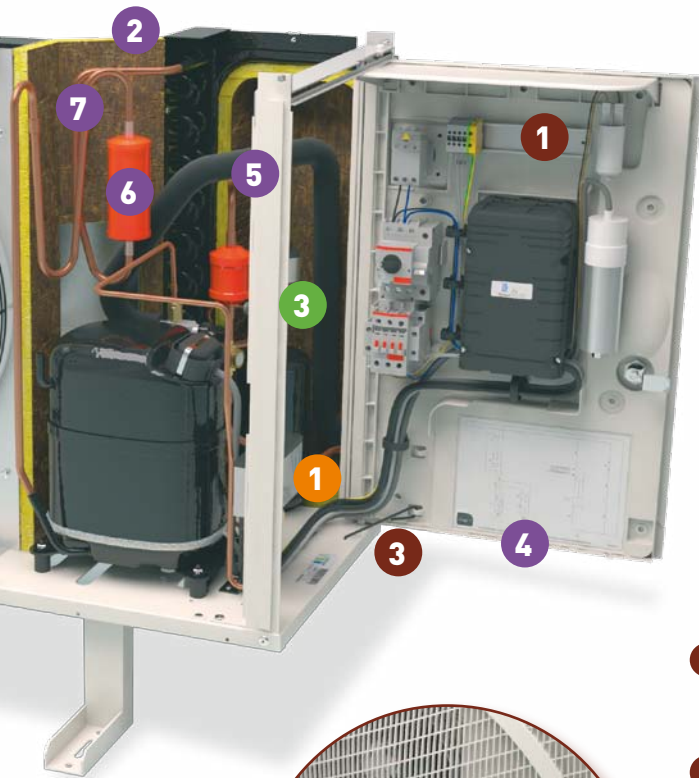

REGULATIONS - CERTIFICATIONS

Silensys® has anticipated the Energy related Product European directive (ErP), applicable for electrical motors placed in effect 2013 and 2015.


The ErP European directive sets minimum efficiency numbers for fans: applicable for fan input power > 125 W.

All Tecumseh fans are CE marked.

INSTALLATION AND MAINTENANCE

It could not be simpler

- 1 Rail DIN length increased to ease integration of additional components
- 2 Floor or wall setting installation (on S and M sizes)
- 3 90° open door lock
- Electrical safety reinforcement:
 - Power circuit breaker
 - Additional circuit breaker on EC fan motor
 - Internal or external overload on compressor
- Valve on liquid receiver for refrigerant capture during maintenance
- Easy removable front panel for accessibility (M, L and XL sizes)

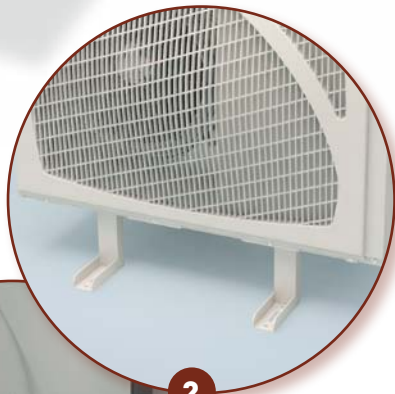

OPTIONS

- Fusible plug to protect over pressure
- Sightglass mount on liquid receiver
- HP/BP – HP pressure switch/ manual reset

SILENSYS®

A range that meets all your needs

MODEL S



MODEL M



MODEL L



Volume

From S to L: 1 m³ to 170 m³

Power

From S to L: 0,5 kW to 14 kW



Small business

Proximity stores/Bio medical

Petrol station

**Whatever the volume to cool,
a Silensys® product meets your needs:**

Applications:

- Cold rooms
- Fermentation chambers
- Refrigerated cabinets
- Wine cellars
- Ice makers

Segments:

- Proximity food stores (small supermarket, petrol station, bakery, butcher's, delicatessen, fish shop...)
- Supermarkets
- Non food proximity stores

Others:

- Wine merchant, beer and wine bar, restaurants, community kitchen, biomedical units, morgue



MODEL XL



XL: 170 m³ to 400 m³

XL: 15 kW to 30 kW






Mini markets /Discounter

A piston range supplemented by a High Efficiency range

In order to reduce energy consumption and ensure greater efficiency, Tecumseh has developed an optimum range regardless the application.

This new product offer, which is part of the Tecumseh proactive approach for "eco-design", takes into account the environmental concern while ensuring silence and performance.

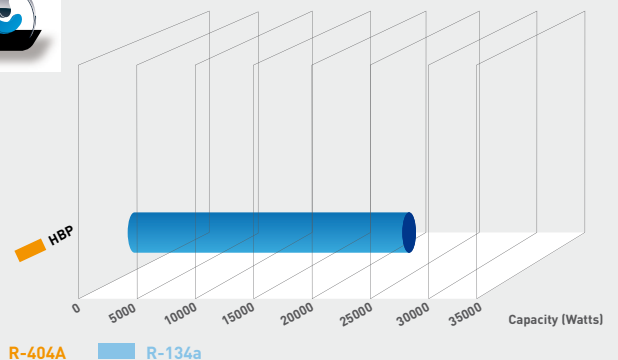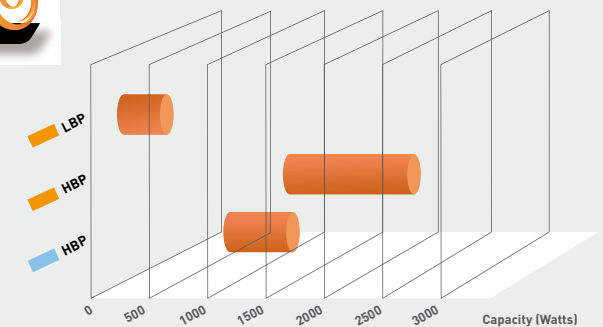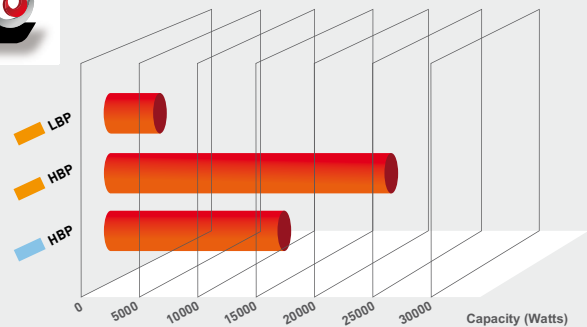

■ R-404A ■ R-134a

Rating conditions
EN 13215

	LBP	HBP
T° evaporating	-35 °C	+5 °C
T° Ambient	+32 °C	+32 °C
T° return gas (= evaporator outlet)	+20 °C	+20 °C
Sub-cooling	3K	3K

TECHNICAL DESCRIPTION

SELECTION GUIDE


UNIT FRAME		S SIZE			M SIZE		
Compressor technology		Piston		Rotary	Piston		Scroll
		AE	AJ	RGA	AJ	FH	VSA
Compressor family							
STANDARD CONTENT							
ACOUSTICS	Acoustic foam	■	■	■	■	■	■
	High efficiency fans	■	■	■	■	■	■
	Fan speed regulation	■	■	■	■	■	■
	Fan air diffuser	■	■	■	■	■	■
	Discharge line muffler*	■	■		■	■	■
ELECTRICAL / RELIABILITY / ENERGY SAVING	Isolator	■	■	■	■	■	■
	IP44	■	■	■	■	■	■
	EC fan motor				■	■	■
	Energy Compliant fans (ErP)	■	■	■	■	■	■
	Fan motor internal protection	■	■	■	■	■	■
	EC fan circuit breaker				■	■	■
	Power circuit breaker	■	■	■	■	■	■
	Compressor internal protection	■	■	■	■	■	■
	Compressor crankcase heater	■	■	■	■	■	■
	Factory tested	■	■	■	■	■	■
	Oil separator			■			
	Oil equalization						
	Start delay						
Digital controler							
COOLING CIRCUIT	Filter drier	■	■	■	■	■	■
	Refrigerant sightglass	■	■	■	■	■	■
	HP/BP pressure switch	■	■	■	■	■	■
	Check valve			■			
	Anti corrosion condenser	■	■	■	■	■	■
	HTA condenser	■	■	■	■	■	■
	Nitrogen filled in	■	■	■	■	■	■
INSTALLATION / MAINTENANCE	Floor / wall mounting	■	■	■	■	■	■
	Weather proof housing	■	■	■	■	■	■
	Door 90° open lock	■	■	■	■	■	■
	Extended din rail	■	■	■	■	■	■
	Access front panel				■	■	■
	Service valves	■	■	■	■	■	■
USE	R134a / R404A refrigerants	■	■	■	■	■	■
	Large ambient T° range	■	■	■	■	■	■
	Multi evaporator operation						
OPTIONS							
OPTION	Fusible plug		■	■	■	■	■
	Liquid receiver sightglass						
	Suction accumulator						

* Component available on some models

[illegible]


Benefits of Reciprocating technology:

- Simple mechanical system using non-complex parts to work with different compression ratios
- Proven technology in refrigeration

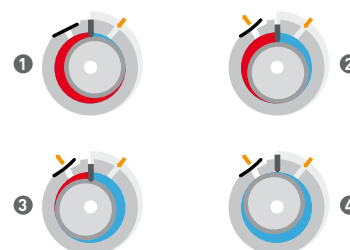

Benefits of Rotary technology:

- Direct suction allows reduced thermal exchange and increased mass flow rate
- Continuous compression cycle and very high volumetric efficiency
- Low consumption on complete working temperature range related to constant torque
- Robustness due to the limited number of parts making up the compressor
- Smooth operation and low resisting torque
- Low oil charge



Benefits of Scroll technology:

- No check valve (almost no sensitivity to liquid flooding)
- Up to 60% less mechanical parts
- 2 moving parts only (15 for a double piston)
- High volumetric efficiency & constant compression ratio
- Internal LP/HP heat exchanges reduction
- Discharge temperature monitoring capability

R-404A

COMMERCIAL LOW TEMPERATURE REFRIGERATION

R-507



PISTON

 PISTON		VOLTAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C								EN13215 Super heating 10K		Sound pressure 10 m	Sound pressure 5 m	
			FZ TZ KZ	Ambient temperature	-40 °C	-35 °C	-30 °C	-25 °C	-20 °C	-15 °C	-10 °C	Cool. cap. (W) -35 °C	Power input (W)	Acoustic* [dB(A)]	
	SILAJ2432Z	FZ/TZ	25	381	539	729	953	1210	1500	1823	445	492			
			32	316	459	631	833	1065	1326	1617	370	483	27	33	
			43	214	333	475	641	833	1050	1291	255	470			
	SILAJ2440Z	FZ	25	453	622	824	1060	1330	1634	1972	510	570			
			32	378	531	714	926	1169	1442	1746	426	564	28	34	
			43	269	398	550	726	927	1153	1405	304	555			
	SILAJ2446Z	FZ/TZ/KZ	25	589	799	1047	1333	1660	2028	2436	662	669			
			32	491	679	898	1149	1433	1751	2103	569	667	29	35	
			43	346	500	675	872	1091	1333	1598	427	664			
	SILAJ2464Z	FZ/TZ/KZ	25	821	1095	1416	1785	2199	2654	3145	901	888			
			32	705	956	1249	1583	1956	2365	2805	769	880	30	36	
			43	526	739	985	1264	1573	1910	2271	566	866			
	SILFH2480Z	FZ/TZ/KZ	25	1064	1480	1952	2474	3039	3636	4252	1211	1339			
			32	862	1263	1711	2201	2726	3278	3844	1011	1308	33	39	
			43	525	902	1311	1750	2214	2696	3187	690	1260			
	SILFH2511Z	FZ/TZ/KZ	25	1425	1973	2603	3313	4100	4958	5880	1609	1671			
			32	1161	1679	2269	2929	3658	4450	5299	1338	1611	34	40	
			43	736	1205	1729	2311	2948	3637	4374	915	1517			
	SILAG2516Z	TZ/KZ	25	2054	2918	3927	5081	6379	7822	9409	2392	2352			
			32	1607	2410	3335	4379	5545	6831	8238	1930	2251	38	44	
			43	905	1612	2403	3277	4235	5275	6398	1230	2091			
	SILAG2522Z	TZ/KZ	25	2530	3516	4629	5870	7239	8734	10357	2867	2616			
			32	2081	2986	4006	5141	6391	7755	9234	2379	2541	39	45	
			43	1376	2154	3028	3996	5059	6217	7469	1635	2423			
	SILAGD2532Z	TZ	25	4086	5561	7301	9306	11576	14110	16910	4524	4190			
			32	3063	4500	6144	7994	10051	12314	14784	3577	4091	43	49	
			43	1456	2833	4326	5933	7655	9491	11442	2148	3935			
	SILAGD2544Z	TZ	25	4786	6712	8845	11185	13732	16486	19446	5437	5109			
			32	3902	5659	7604	9737	12057	14565	17261	4470	4960	44	50	
			43	2512	4004	5653	7461	9426	11548	13828	3001	4725			

Preliminary data.

* Sound level at maximum speed ventilation

** In: nominal current - Im: maximal current

Sound power	Technical data				FZ Voltage code			TZ Voltage code			KZ Voltage code			Weight	
	Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			400V 50 Hz / 440V 60 Hz 3~			220V 50 Hz / 220V 60 Hz 3~			Gross (kg)	Net (kg)
			Suction	Liquid line	Power input (W)	In (A)**	Im (A)	Power input (W)	In (A)	Im (A)	Power input (W)	In (A)	Im (A)		
58	1 650	1,5	1/2	1/4	483	2,2	6,8	541	1	2,7	-	-	-	88	67
59	1 650	1,5	1/2	1/4	564	2,5	6,2	-	-	-	-	-	-	88	68
60	1 650	1,5	1/2	3/8	667	3,1	8,4	647	1,5	3,4	659	3	6,1	89	69
61	1 650	1,5	5/8	3/8	880	4,1	10,5	838	2	3,8	826	3,8	8,4	92	72
64	2 700	2,35	5/8	1/2	1 380	6,8	17,1	1 257	3	5,9	1 293	5	12,7	106	84
65	2 700	2,35	5/8	1/2	1 683	9,6	25,1	1 530	3,7	6,1	1 703	6,2	14,4	108	86
69	5 400	6	7/8	3/8	-	-	-	2 395	4,8	12	2 609	9,3	26,9	144	129
70	5 400	6	7/8	3/8	-	-	-	2 685	6,2	14,7	3 221	11,9	31,7	146	135
74	6 600	9,5	1 1/8	5/8	-	-	-	4 471	8,8	21,8	-	-	-	284	257
75	6 600	9,5	1 1/8	5/8	-	-	-	5 340	10,7	27,2	-	-	-	290	263

Old letter code	New letter code	Designation
F	FZ	220-240V-50Hz
/	XC	220-240V-50Hz
K	KZ	220V 3-50Hz 220V 3-60Hz
T	TZ	400V 3-50Hz 440V 3-60Hz
/	XG	380-420V 3-50Hz 460V 3-60Hz

Cooling capacity according EN 13215 conditions: suction gas 20 °C, sub cooling 3K, Ambient T° 32 °C.

Cooling performances are listed for single phase groups.

For three-phase groups in some cases they may be different.

Presentation of acoustic values of maximum fan speed in a straight line and according EN 13215.

In a constant effort to reconcile reported and actual acoustic values,

Tecumseh Europe meets the acoustic standard EN ISO 3743-1.

Silensys® is designed to operate in high ambient temperatures (Ambient T° 46 °C).



PISTON

		VOLTAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C								EN13215 Super heating 10K		Sound pressure 10 m	Sound pressure 5 m	Sound power	
			FZ TZ K	Ambient temperature	-15 °C	-10 °C	-5 °C	0 °C	5 °C	10 °C	15 °C	Cool. cap. (W) -10 °C				Power input (W)
	SILAE4440Y	FZ	25	536	679	855	1064	1306	1581	1890	636	412				
			32	481	611	772	964	1186	1439	1723	569	425	27	33	58	
			43	393	504	642	807	998	1216	1460	465	445				
	SILAJ4461Y	FZ/TZ	25	757	970	1221	1512	1845	2221	2643	907	499				
			32	686	882	1112	1380	1688	2038	2431	820	517	28	34	59	
			43	573	742	941	1174	1442	1750	2099	683	545				
	SILAJ4476Y	FZ/KZ	25	910	1164	1457	1790	2164	2582	3042	1088	602				
			32	804	1042	1313	1621	1966	2350	2773	968	610	29	35	60	
			43	628	838	1076	1343	1641	1972	2336	770	622				
SILAJ4492Y	FZ/TZ	25	1151	1463	1821	2224	2672	3162	3692	1370	676					
		32	1024	1313	1643	2014	2424	2874	3361	1222	692	29	35	60		
		43	810	1069	1360	1683	2039	2429	2852	983	716					
SILAJ4511Y	FZ/TZ/KZ	25	1458	1832	2252	2715	3217	3753	4317	1710	788					
		32	1321	1670	2059	2485	2945	3434	3947	1550	809	30	36	61		
		43	1094	1405	1746	2116	2511	2928	3362	1289	841					
	SILFH4518Y	FZ/TZ/KZ	25	2186	2697	3313	4036	4864	5798	6837	2516	1270				
			32	1858	2359	2951	3635	4410	5276	6234	2187	1282	34	40	65	
			43	1343	1828	2382	3005	3696	4456	5285	1675	1302				
	SILFH4525Y	FZ/TZ/KZ	25	2843	3512	4276	5134	6086	7133	8274	3266	1707				
			32	2475	3102	3817	4619	5509	6486	7551	2867	1703	36	42	67	
			43	1896	2458	3096	3810	4602	5470	6415	2245	1695				
		SILAG4528Y	TZ/KZ	25	3074	4120	5324	6685	8203	9878	11711	3846	1697			
				32	2645	3586	4680	5926	7326	8878	10583	3328	1796	39	45	70
				43	1972	2746	3667	4734	5947	7306	8811	2520	1951			
SILAG4534Y		TZ/KZ	25	3490	4622	5920	7384	9014	10810	12772	4315	2039				
			32	3007	4020	5192	6525	8017	9668	11479	3730	2029	39	45	70	
			43	2247	3074	4049	5175	6450	7874	9448	2820	2013				
SILAG4537Y		TZ/KZ	25	4247	5434	6808	8369	10117	12052	14174	5070	2342				
			32	3626	4730	6001	7440	9047	10822	12765	4401	2291	39	45	70	
			43	2649	3622	4733	5981	7366	8889	10550	3319	2434				
SILAG4543Y	TZ/KZ	25	4790	6114	7598	9241	11043	13004	15124	5701	2548					
		32	4106	5328	6694	8203	9855	11650	13589	4936	2556	39	45	70		
		43	3031	4092	5273	6571	7988	9523	11177	3746	2570					
	SILAGD4556Y	TZ	25	6004	7771	9826	12170	14802	17723	20932	7251	3214				
			32	4803	6462	8390	10588	13054	15790	18795	5993	3284	46	52	77	
			43	2916	4405	6134	8101	10308	12753	15437	4040	3393				
	SILAGD4568Y	TZ	25	6911	8934	11252	13866	16775	19980	23481	8320	3883				
			32	5788	7696	9864	12291	14977	17923	21129	7128	3849	46	52	77	
			43	4024	5752	7683	9816	12152	14691	17433	5272	3795				
	SILAGD4574Y	TZ	25	7528	9591	11978	14689	17724	21083	24765	8935	4185				
			32	6382	8375	10632	13155	15943	18995	22312	7752	4278	46	52	77	
			43	4580	6463	8517	10744	13144	15715	18458	5910	4425				
SILAGD4586Y	TZ	25	7654	9906	12484	15388	18619	22177	26061	9229	4291					
		32	6634	8727	11109	13780	16739	19988	23526	8083	4320	46	52	77		
		43	5031	6875	8949	11252	13785	16549	19542	6298	4364					

Preliminary data.

* Sound level at maximum speed ventilation
 ** In: nominal current - Im: maximal current

Technical data				FZ Voltage code			TZ Voltage code			KZ Voltage code			Weight	
Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			400V 50 Hz / 440V 60 Hz 3~			220V 50 Hz / 220V 60 Hz 3~			Gross (kg)	Net (kg)
		Suction	Liquid line	Power input (W)	In (A)**	Im (A)	Power input (W)	In (A)	Im (A)	Power input (W)	In (A)	Im (A)		
1 650	0,75	3/8	1/4	504	3,2	4,5	-	-	-	-	-	-	86	66
1 650	1,5	1/2	1/4	667	4,0	6,4	616	1,6	2,7	-	-	-	86	66
1 650	1,5	1/2	3/8	794	5,0	7,7	-	-	-	726	3,11	4,1	88	68
1 650	1,5	1/2	3/8	928	5,8	8,9	766	2,0	3,3	-	-	-	88	68
1 650	1,5	5/8	3/8	1 123	5,2	9,4	1 128	2,3	3,9	1 144	4,3	8,3	89	69
2 700	2,35	5/8	1/2	1 841	8,5	12,3	1 441	3,8	5,3	1 597	5,7	8,1	101	79
2 700	2,35	5/8	1/2	2 477	11,1	16,3	1 710	4,6	6,7	2 036	6,7	13,1	103	81
5 400	6	7/8	3/8	-	-	-	2 596	5,1	11,6	2 222	10,0	26,2	143	128
5 400	6	7/8	3/8	-	-	-	2 932	5,7	12,6	2 631	11,4	26,2	143	128
5 400	6	7/8	3/8	-	-	-	3 439	6,4	12,2	2 938	12,2	26,2	143	128
5 400	6	7/8	3/8	-	-	-	3 796	6,9	12,2	3 221	13,3	26,2	143	128
6 600	9,5	1 1/8	5/8	-	-	-	4 746	10,7	21,2	-	-	-	285	258
6 600	9,5	1 1/8	5/8	-	-	-	5 587	11,9	23,2	-	-	-	284	257
6 600	9,5	1 1/8	5/8	-	-	-	6 203	12,6	22,4	-	-	-	284	257
6 600	9,5	1 1/8	5/8	-	-	-	6 780	13,5	22,4	-	-	-	284	257

Old letter code	New letter code	Designation
F	FZ	220-240V~50Hz
/	XC	220-240V~50Hz
K	KZ	220V 3~50Hz 220V 3~60Hz
T	TZ	400V 3~50Hz 440V 3~60Hz
/	XG	380-420V 3~50Hz 440V 3~60Hz

Cooling capacity according EN 13215 conditions: suction gas 20 °C, sub cooling 3K, Ambient T° 32 °C.
Cooling performances are listed for single phase groups.
For three-phase groups in some cases they may be different.
Presentation of acoustic values of maximum fan speed in a straight line and according EN 13215.
In a constant effort to reconcile reported and actual acoustic values, Tecumseh Europe meets the acoustic standard EN ISO 3743-1.
Silensys® is designed to operate in high ambient temperatures (Ambient T° 46 °C).



PISTON



 PISTON		VOL- TAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C									EN13215 Super heating 10K		Sound pressure 10 m	Sound pressure 5 m
			FZ TZ KZ	Ambient temperature	-20 °C	-15 °C	-10 °C	-5 °C	0 °C	5 °C	10 °C	15 °C	Cool. cap. (W) -10 °C	Power input (W)	Acoustic* [dB(A)]
	SILAE9450Z	FZ	25	631	788	974	1188	1431	1703	2003	2333	833	448		
			32	539	678	843	1034	1251	1494	1764	2059	756	469	30	36
			43	395	506	638	792	968	1166	1387	1629	559	502		
	SILAE9460Z	FZ	25	744	923	1130	1365	1631	1929	2262	2633	1022	636		
			32	643	804	987	1194	1427	1688	1979	2304	881	627	30	36
			43	484	615	760	922	1102	1303	1528	1782	660	615		
	SILAJ9480Z	FZ/TZ	25	1037	1280	1556	1866	2208	2580	2980	3404	1409	695		
			32	917	1140	1391	1671	1979	2312	2671	3051	1247	724	29	35
			43	724	918	1132	1366	1620	1894	2189	2502	993	770		
	SILAJ9510Z	FZ/TZ	25	1284	1574	1904	2271	2674	3108	3570	4056	1722	845		
			32	1137	1405	1704	2035	2396	2785	3199	3634	1524	879	29	35
			43	900	1131	1384	1659	1956	2274	2613	2971	1210	932		
	SILAJ9513Z	FZ/TZ	25	1572	1948	2361	2809	3291	3801	4338	4898	2131	1003		
			32	1361	1710	2087	2491	2918	3368	3837	4324	1864	1022	29	35
			43	1022	1329	1649	1982	2326	2680	3045	3419	1441	1053		
	SILAJ4517Z	FZ/ TZ/KZ	25	1725	2142	2608	3118	3668	4254	4870	5510	2348	1180		
			32	1501	1896	2326	2791	3286	3807	4350	4910	2072	1223	36	42
			43	1143	1498	1871	2262	2668	3086	3515	3951	1629	1291		
	SILAJ4519Z	FZ/ TZ/KZ	25	2231	2767	3362	4016	4729	5497	6321	7198	3020	1582		
			32	1993	2489	3030	3615	4243	4912	5622	6369	2693	1634	36	42
			43	1608	2039	2492	2966	3459	3971	4501	5048	2168	1716		
	SILFH4524Z	FZ/ TZ/KZ	25	2445	3097	3820	4610	5464	6380	7351	8376	3433	1766		
			32	2096	2706	3370	4086	4853	5668	6530	7436	2995	1790	37	43
			43	1530	2070	2639	3238	3866	4525	5216	5941	2291	1826		
	SILFH4531Z	FZ/ TZ/KZ	25	3248	4098	4968	5859	6772	7706	8663	9641	4456	2322		
			32	2676	3539	4393	5245	6098	6956	7820	8697	3898	2309	37	43
			43	1714	2606	3447	4248	5017	5763	6496	7231	2992	2287		
	SILFH4540Z	FZ/ TZ/KZ	25	3841	4765	5753	6776	7801	8794	9722	10550	5140	2941		
			32	3396	4262	5173	6105	7031	7921	8747	9483	4567	2974	37	43
			43	2603	3388	4190	4990	5770	6511	7195	7818	3609	3025		

Preliminary data.

* Sound level at maximum speed ventilation

** In: nominal current - Im: maximal current

Sound power	Technical data				FZ Voltage code			TZ Voltage code			KZ Voltage code			Weight	
	Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			400V 50 Hz / 440V 60 Hz 3~			220V 50 Hz / 220V 60 Hz 3~			Gross (kg)	Net (kg)
			Suction	Liquid line	Power input (W)	In (A)**	Im (A)	Power input (W)	In (A)	Im (A)	Power input (W)	In (A)	Im (A)		
61	1 650	0,75	3/8	1/4	551	3,0	4,4	-	-	-	-	-	-	79	59
61	1 650	0,75	3/8	1/4	743	3,2	6,0	-	-	-	-	-	-	79	59
60	1 650	1,5	1/2	3/8	891	4,1	7,2	902	2,0	3,4	-	-	-	88	68
60	1 650	1,5	5/8	3/8	1 112	5,2	8,5	1 138	2,3	3,5	-	-	-	89	69
60	1 650	1,5	5/8	3/8	1 354	6,5	10,7	1 287	2,7	4,2	-	-	-	91	71
67	2 700	2,35	5/8	3/8	1 663	7,5	13,8	1 651	3,6	5,1	1 536	5,9	7,9	92	70
67	2 700	2,35	5/8	3/8	2 174	10	16,3	2 167	4,7	5,9	2 207	7,9	12,3	93	71
68	2 700	2,35	5/8	1/2	2 463	11	20,7	2 458	4,9	8,8	2 459	8	11,1	106	83
68	2 700	3,9	7/8	1/2	3 215	14,2	23,5	3 068	5,8	10,1	3 136	9,8	14,5	109	87
68	2 700	3,9	7/8	1/2	4 188	19,3	28,1	4 107	8,4	10,3	4 269	14,8	21,7	109	87

More models next page →

Old letter code	New letter code	Designation
F	FZ	220-240V-50Hz
/	XC	220-240V-50Hz
K	KZ	220V 3~50Hz 220V 3~60Hz
T	TZ	400V 3~50Hz 440V 3~60Hz
/	XG	380-420V 3~50Hz 460V 3~60Hz

Cooling capacity according EN 13215 conditions: suction gas 20 °C, sub cooling 3K, Ambient T° 32 °C.
Cooling performances are listed for single phase groups.
For three-phase groups in some cases they may be different.
Presentation of acoustic values of maximum fan speed in a straight line and according EN 13215.
In a constant effort to reconcile reported and actual acoustic values, Tecumseh Europe meets the acoustic standard EN ISO 3743-1.
Silensys® is designed to operate in high ambient temperatures (Ambient T° 46 °C).



PISTON



 PISTON		VOL-TAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C									EN13215 Super heating 10K		Sound pressure 10 m	Sound pressure 5 m
		FZ TZ K	Ambient temperature	-20 °C	-15 °C	-10 °C	-5 °C	0 °C	5 °C	10 °C	15 °C	Cool. cap. (W) -10 °C	Power input (W)	Acoustic* [dB(A)]	
	SILAG4546Z	TZ/KZ	25	4 501	5 714	7 063	8 522	10 060	11 642	13 228	14 778	6 350	3 094		
			32	3 757	4 875	6 108	7 434	8 826	10 257	11 692	13 101	5 431	3 082	37	43
			43	2 629	3 599	4 649	5 765	6 932	8 130	9 338	10 544	4 038	3 063		
	SILAG4553Z	TZ/KZ	25	5 060	6 386	7 855	9 437	11 100	12 804	14 511	16 180	7 071	3 449		
			32	4 270	5 498	6 839	8 271	9 768	11 299	12 831	14 333	6 092	3 462	37	43
			43	3 019	4 107	5 261	6 471	7 720	8 990	10 262	11 526	4 590	3 482		
	SILAG4561Z	TZ/KZ	25	5 829	7 268	8 854	10 555	12 335	14 153	15 965	17 727	7 939	3 904		
			32	4 989	6 329	7 783	9 328	10 934	12 568	14 194	15 778	6 900	3 927	37	43
			43	3 630	4 837	6 106	7 424	8 773	10 134	11 487	12 821	5 288	3 962		
	SILAG4568Z	TZ/KZ	25	6 995	8 597	10 370	12 287	14 317	16 425	18 574	20 728	9 318	4 230		
			32	6 062	7 580	9 236	11 011	12 879	14 814	16 786	18 770	8 207	4 320	37	43
			43	4 590	5 972	7 442	8 992	10 608	12 278	13 988	15 741	6 463	4 461		
SILAG4573Z	TZ/KZ	25	7 581	9 302	11 201	13 243	15 388	17 592	19 807	21 983	10 048	4 740			
		32	6 646	8 244	9 982	11 834	13 768	15 748	17 735	19 691	8 853	4 802	37	43	
		43	5 119	6 518	8 002	9 558	11 166	12 804	14 451	16 097	6 933	4 900			
	SILAGD4590Z	TZ/KZ	25	8 682	11 106	13 812	16 755	19 883	23 134	26 441	29 733	12 386	6 100		
			32	7 223	9 425	11 849	14 458	17 205	20 036	22 892	25 716	10 501	6 087	44	50
			43	5 023	6 877	8 863	10 954	13 113	15 302	17 486	19 654	7 663	6 068		
	SILAGD4610Z	TZ/KZ	25	9 588	12 170	15 007	18 039	21 197	24 400	27 559	30 588	13 413	6 955		
			32	8 178	10 568	13 156	15 890	18 710	21 545	24 321	26 967	11 635	6 923	44	50
			43	5 947	8 063	10 283	12 571	14 883	17 169	19 382	21 501	8 903	6 873		
	SILAGD4612Z	TZ/KZ	25	10 739	13 341	16 154	19 110	22 135	25 152	28 083	30 863	14 382	7 770		
			32	9 142	11 529	14 057	16 664	19 285	21 855	24 311	26 616	12 362	7 799	44	50
			43	6 546	8 639	10 759	12 858	14 892	16 820	18 636	20 358	9 221	7 846		
	SILAGD4614Z	TZ/KZ	25	12 925	15 632	18 572	21 685	24 914	28 215	31 560	34 948	16 492	8 647		
			32	11 017	13 536	16 220	19 019	21 894	24 819	27 790	30 857	14 209	8 780	44	50
			43	8 018	10 237	12 517	14 835	17 182	19 580	22 118	24 412	10 648	8 989		
SILAGD4615Z	TZ/KZ	25	13 718	16 609	19 702	22 922	26 196	29 459	32 654	35 758	17 466	9 583			
		32	11 977	14 572	17 282	20 037	22 773	25 435	27 992	30 469	15 123	9 658	44	50	
		43	9 192	11 323	13 434	15 469	17 388	19 179	20 905	21 654	11 436	9 778			

Preliminary data.

* Sound level at maximum speed ventilation

** In: nominal current - Im: maximal current

Sound power	Technical data				FZ Voltage code			TZ Voltage code			KZ Voltage code			Weight	
	Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			400V 50 Hz / 440V 60 Hz 3~			220V 50 Hz / 220V 60 Hz 3~			Gross (kg)	Net (kg)
			Suction	Liquid line	Power input (W)	In (A)**	Im (A)	Power input (W)	In (A)	Im (A)	Power input (W)	In (A)	Im (A)		
68	5400	6	7/8	5/8	-	-	-	4467	8,5	12,5	4297	14,8	24,2	143	128
68	5400	6	7/8	5/8	-	-	-	4994	9,1	14,5	4802	16,1	28,4	149	134
68	5400	6	1 1/8	5/8	-	-	-	5771	9,7	15,1	5544	18,7	30,9	149	134
68	5400	6	1 1/8	5/8	-	-	-	6289	10,8	16,3	6323	21,5	36,6	153	138
68	5400	6	1 1/8	5/8	-	-	-	7072	12,5	19,1	7985	23,9	33,1	154	139
75	6600	9,5	1 1/8	5/8	-	-	-	8936	15,3	26,2	8556	30,8	46,6	301	274
75	6600	9,5	1 1/8	5/8	-	-	-	10251	17	29,2	9900	33,8	54,8	302	275
75	6600	11,5	1 3/8	7/8	-	-	-	11661	18,1	30,4	11206	36,8	59,8	304	277
75	6600	11,5	1 3/8	7/8	-	-	-	13145	20,6	32,8	12626	44,2	71,2	307	280
75	6600	11,5	1 3/8	7/8	-	-	-	14528	23,7	38,4	14044	48,8	64,2	307	280

Old letter code	New letter code	Designation
F	FZ	220-240V-50Hz
/	XC	220-240V-50Hz
K	KZ	220V 3-50Hz 220V 3-60Hz
T	TZ	400V 3-50Hz 440V 3-60Hz
/	XG	380-420V 3-50Hz 460V 3-60Hz

Cooling capacity according EN 13215 conditions: suction gas 20 °C, sub cooling 3K, Ambient T° 32 °C.
Cooling performances are listed for single phase groups.
For three-phase groups in some cases they may be different.
Presentation of acoustic values of maximum fan speed in a straight line and according EN 13215.
In a constant effort to reconcile reported and actual acoustic values, Tecumseh Europe meets the acoustic standard EN ISO 3743-1.
Silensys® is designed to operate in high ambient temperatures (Ambient T° 46 °C).

R-404A

COMMERCIAL HIGH TEMPERATURE REFRIGERATION

R-507



SCROLL

			VOLTAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C							EN13215 Super heating 10K		Sound pressure 10 m	Sound pressure 5 m	Sound power
			XC/XG	Ambient temperature	-15 °C	-10 °C	-5 °C	0 °C	5 °C	10 °C	Cool. cap. (W) -10 °C	Power input (W)	Acoustic* [dB(A)]		
	SILVS9510Z	XC/XG	25	2490	3000	3600	4260	4975	5730		2720	1250			
			32	2260	2735	3280	3880	4530	5210		2440	1400	36	42	67
			43	1780	2160	2590	3060	3570	4100		1990	1655			
	SILVS9514Z	XC/XG	25	3355	4000	4715	5500	6345	7250		3610	1820			
			32	3065	3655	4300	5010	5770	6575		3240	2050	36	42	67
			43	2460	2930	3430	3974	4555	5180		2665	2430			
	SILVS9517Z	XC/XG	25	4140	4890	5715	6615	7585	8620		4380	2110			
			32	3770	4460	5210	6030	6900	7840		3940	2435	37	43	68
			43	2960	3510	4100	4740	5435	6200		3190	2880			
	SILVS9521Z	XC/XG	25	4940	5890	6940	8080	9310	10610		5310	2550			
			32	4535	5415	6380	7425	8540	9715		4795	2830	37	43	68
			43	3625	4340	5115	5950	6840	7780		3955	3320			
	SILVS9524Z	XG	25	5310	6320	7440	8665	9985	11395		5665	2500			
			32	4350	5300	6405	7675	9135	10825		5135	2880	40	46	71
			43	3390	4155	5055	6095	7325	8785		4235	3500			
	SILVS9528Z	XG	25	6670	7915	9285	10755	12310	13920		7110	3060			
			32	6150	7300	8540	9865	11255	12690		6480	3415	40	46	71
			43	5050	5975	6955	7985	9050	10135		5435	3975			
	SILVS9536Z	XG	25	8295	9710	11225	12830	14495	16200		8685	3910			
			32	7635	8940	10325	11785	13300	14860		7895	4325	40	46	71
			43	6170	7240	8360	9535	10765	12050		6550	4970			
	SILVS9544Z	XG	25	10025	11675	13380	15090	16755	18325		10400	5090			
			32	9195	10750	12365	14000	15625	17185		9450	5615	40	46	71
			43	7355	8660	10080	11585	13145	14740		7805	6445			
	SILVS9548Z	XG	25	9558	11376	13392	15597	17973	20511		10200	5000			
			32	7830	9540	11529	13815	16443	19485		9245	5760	46	52	77
			43	6102	7479	9099	10971	13185	15813		7625	7000			
	SILVS9556Z	XG	25	12010	14250	16715	19360	22160	25060		12800	6120			
			32	11070	13140	15375	17760	20260	22845		11665	6830	46	52	77
			43	9090	10755	12520	14375	16290	18245		9785	7950			
	SILVS9572Z	XG	25	14930	17480	20205	23095	26100	29160		15635	7820			
			32	13745	16100	18585	21215	23940	26750		14210	8650	46	52	77
			43	11110	13035	15050	17165	19380	21690		11790	9940			
	SILVS9588Z	XG	25	18045	21015	24085	27165	30160	32985		18720	10180			
			32	16555	19350	22260	25200	28125	30935		17010	11230	46	52	77
			43	13240	15590	19145	20855	23665	26535		14050	12890			

Preliminary data.

* Sound level at maximum speed ventilation
 ** In: nominal current - Im: maximal current

NB: Scroll compressor "power" is calculated at - 6,7 °C instead of + 7,2 °C for the other compressors technologies.

Technical data				XC Voltage code			XG Voltage code			Overall dimensions			Weight	
Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			380/420V 50 Hz / 460V 60 Hz 3~			A (mm) length	B (mm) depth	C (mm) height	Gross (kg)	Net (kg)
		Suction	Liquid line	Power input (W)	In (A)**	Im (A)	Power input (W)	In (A)	Im (A)					
2700	2,35	3/4	3/8	1507	6,9	15,8	1477	2,8	5,7	1145	575	690	106	84
2700	2,35	3/4	3/8	2116	10,4	24,5	1991	3,4	7,1	1145	575	690	107	85
2700	3,9	7/8	1/2	2340	11,6	20,7	2187	4,2	7,7	1145	575	690	108	86
2700	3,9	7/8	1/2	2781	14,3	24,4	2620	5,1	9,9	1145	575	690	108	86
5400	6	7/8	5/8	-	-	-	2865	5,2	11,4	1145	575	1315	142	127
5400	6	7/8	5/8	-	-	-	3612	6,3	13,9	1145	575	1315	158	143
5400	6	7/8	5/8	-	-	-	4617	8,5	17,4	1145	575	1315	161	146
5400	6	7/8	5/8	-	-	-	5753	9,9	21,5	1145	575	1315	165	150
6600	9,5	1" 1/8	5/8	-	-	-	5960	12,2	20,8	1615	575	1300	283	256
6600	9,5	1" 1/8	5/8	-	-	-	7454	14,4	25,8	1615	575	1300	315	288
6600	11,5	1" 3/8	7/8	-	-	-	9464	18,8	32,8	1615	575	1300	321	294
6600	11,5	1" 3/8	7/8	-	-	-	11736	21,6	41,0	1615	575	1300	329	302

Old letter code	New letter code	Designation
F	FZ	220-240V-50Hz
/	XC	220-240V-50Hz
K	KZ	220V 3-50Hz 220V 3-60Hz
T	TZ	400V 3-50Hz 440V 3-60Hz
/	XG	380-420V 3-50Hz 460V 3-60Hz

Cooling capacity according EN 13215 conditions: suction gas 20 °C, sub cooling 3K, Ambient T° 32 °C.
Cooling performances are listed for single phase groups.
For three-phase groups in some cases they may be different.
Presentation of acoustic values of maximum fan speed in a straight line and according EN 13215.
In a constant effort to reconcile reported and actual acoustic values, Tecumseh Europe meets the acoustic standard EN ISO 3743-1.
Silensys® is designed to operate in high ambient temperatures (Ambient T° 46 °C).

R-404A

R-507

COMMERCIAL LOW TEMPERATURE REFRIGERATION





 ROTARY		VOLTAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C								EN13215 Super heating 10K	
		FZ	Ambient temperature	-40 °C	-35 °C	-30 °C	-25 °C	-20 °C	-15 °C	-10 °C	Cool. cap. (W) -35 °C	Power input (W)
	SILRG2426Z	FZ	25	310	405	550	720	910	1 125	1 365	325	340
			32	300	380	470	670	850	1 030	1 250	305	350
			43	160	250	355	480	625	790	970	200	360
	SILRG2432Z	FZ	25	365	490	665	870	1 100	1 360	1 650	390	400
			32	345	440	575	755	970	1 205	1 450	360	415
			43	195	300	430	580	755	955	1 170	240	425
	SILRG2436Z	FZ	25	400	540	730	955	1 210	1 500	1 825	430	430
			32	380	480	630	830	1 065	1 325	1 615	385	450
			43	215	330	475	640	830	1 050	1 290	265	470
	SILRG2446Z	FZ	25	505	680	920	1 200	1 525	1 890	2 300	545	540
			32	480	605	795	1 050	1 340	1 500	1 900	485	560
			43	280	415	600	800	1 045	1 330	1 590	330	580

Preliminary data.

* Sound level at maximum speed ventilation
 ** In: nominal current - Im: maximal current

R-404A

COMMERCIAL HIGH TEMPERATURE REFRIGERATION

 ROTARY		VOLTAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C							EN13215 Super heating 10K		
		FZ	Ambient temperature	-15 °C	-10 °C	-5 °C	-0 °C	5 °C	10 °C	15 °C	Cool. cap. (W) -10 °C	Power input (W)
	SILRG4467Z	FZ	25	950	1 150	1 400	1 650	1 930	2 300	2 650	1 045	410
			32	820	1 000	1 200	1 450	1 700	1 970	2 300	910	425
			43	665	810	975	1 150	1 350	1 530	1 785	735	450
	SILRG4480Z	FZ	25	1 115	1 350	1 635	1 925	2 240	2 600	3 025	1 200	490
			32	980	1 195	1 425	1 700	1 950	2 310	2 650	1 090	510
			43	800	980	1 170	1 375	1 625	1 855	2 155	880	540
	SILRG4492Z	FZ	25	1 280	1 550	1 870	2 200	2 550	2 900	3 400	1 385	565
			32	1 140	1 390	1 650	1 950	2 200	2 650	3 000	1 260	590
			43	940	1 150	1 370	1 600	1 900	2 180	2 530	1 035	625
	SILRG4512Z	FZ	25	1 580	1 900	2 270	2 670	3 100	3 570	4 050	1 720	715
			32	1 380	1 665	1 985	2 345	2 750	3 200	3 680	1 520	745
			43	1 130	1 380	1 660	1 950	2 300	2 650	3 100	1 210	790

Preliminary data.

* Sound level at maximum speed ventilation
 ** In: nominal current - Im: maximal current

Sound pressure 10 m	Sound pressure 5 m	Sound power	Technical data				FZ Voltage code			Weight	
Acoustic* [dB(A)]			Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			Gross (kg)	Net (kg)
					Suction	Liquid line	Power input (W)	In (A)**	Im (A)		
29	35	60	1 650	1,5	3/8	1/4	365	1,7	3,9	79	58
30	36	61	1 650	1,5	3/8	1/4	423	2	4,7	79	59
31	37	62	1 650	1,5	1/2	1/4	457	2	5,5	78	58
31	37	62	1 650	1,5	1/2	3/8	555	2,5	5,9	80	60

Sound pressure 10 m	Sound pressure 5 m	Sound power	Technical data				FZ Voltage code			Weight	
Acoustic* [dB(A)]			Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			Gross (kg)	Net (kg)
					Suction	Liquid line	Power input (W)	In (A)**	Im (A)		
29	35	60	1 650	1,5	3/8	1/4	558	2,5	5	80	59
30	36	61	1 650	1,5	3/8	3/8	672	3,2	5,8	80	59
29	35	60	1 650	1,5	1/2	3/8	722	3,2	6,4	80	60
29	35	60	1 650	1,5	1/2	3/8	930	4,2	7,2	83	62

Old letter code	New letter code	Designation
F	FZ	220-240V~50Hz
/	XC	220-240V~50Hz
K	KZ	220V 3~50Hz 220V 3~60Hz
T	TZ	400V 3~50Hz 440V 3~60Hz
/	XG	380-420V 3~50Hz 460V 3~60Hz

Cooling capacity according EN 13215 conditions: suction gas 20 °C, sub cooling 3K, Ambient T° 32 °C.
Cooling performances are listed for single phase groups.
For three-phase groups in some cases they may be different.
Presentation of acoustic values of maximum fan speed in a straight line and according EN 13215.
In a constant effort to reconcile reported and actual acoustic values, Tecumseh Europe meets the acoustic standard EN ISO 3743-1.
Silensys® is designed to operate in high ambient temperatures (Ambient T° 46 °C).



ROTARY







		VOLTAGE CODE	Cooling capacity (Watts) EN13215 Return suction gas 20 °C								EN13215 Super heating 10K	
		FZ	Ambient temperature	-15 °C	-10 °C	-5 °C	-0 °C	5 °C	10 °C	15 °C	Cool. cap. (W) -10 °C	Power input (W)
	SILRG4445Y	FZ	25	540	680	855	1 065	1 310	1 590	1 890	640	360
			32	485	615	775	965	1 190	1 440	1 725	570	375
			43	395	505	645	810	1 000	1 220	1 460	465	395
	SILRG4450Y	FZ	25	595	755	945	1 135	1 350	1 625	1 940	710	390
			32	535	680	855	1 030	1 230	1 485	1 780	635	405
			43	425	555	710	860	1 040	1 265	1 515	515	420
	SILRG4460Y	FZ	25	700	900	1 125	1 270	1 420	1 695	2 035	845	450
			32	625	805	1 010	1 155	1 300	1 570	1 870	755	460
			43	485	650	830	965	1 115	1 350	1 615	610	480
	SILRG4476Y	FZ	25	910	1 165	1 460	1 650	1 845	2 200	2 645	1 090	550
			32	810	1 045	1 315	1 500	1 690	2 040	2 430	970	570
			43	630	840	1 080	1 250	1 445	1 750	2 100	790	580

Preliminary data.

* Sound level at maximum speed ventilation

** In: nominal current - Im: maximal current

MODELS DIMENSIONS

Overall dimensions			
MODELS	A - length (mm)	B - depth (mm)	C - height (mm)
S	930	575	690
M	1 145	575	690
L	1 145	575	1 315
XL	1 615	575	1 300

Sound pressure 10 m	Sound pressure 5 m	Sound power	Technical data				FZ Voltage code			Weight	
Acoustic* [dB(A)]			Air flow (m³/h)	Liquid receiver volume (L)	For tubing O.D.		220V - 240V 50 Hz 1~			Gross (kg)	Net (kg)
					Suction	Liquid line	Power input (W)	In (A)**	Im (A)		
31	37	62	1 650	1,5	3/8	1/4	389	2,4	4,1	78	58
30	36	61	1 650	1,5	3/8	1/4	448	2,8	4,4	78	58
29	35	60	1 650	1,5	1/2	1/4	492	3	4,8	79	59
29	35	60	1 650	1,5	1/2	3/8	594	3,6	5,9	80	59

Old letter code	New letter code	Designation
F	FZ	220-240V-50Hz
/	XC	220-240V-50Hz
K	KZ	220V 3~50Hz 220V 3~60Hz
T	TZ	400V 3~50Hz 440V 3~60Hz
/	XG	380-420V 3~50Hz 460V 3~60Hz

Cooling capacity according EN 13215 conditions: suction gas 20 °C, sub cooling 3K, Ambient T° 32 °C.


Cooling performances are listed for single phase groups.

For three-phase groups in some cases they may be different.

Presentation of acoustic values of maximum fan speed in a straight line and according EN 13215.

In a constant effort to reconcile reported and actual acoustic values, Tecumseh Europe meets the acoustic standard EN ISO 3743-1.

Silensys® is designed to operate in high ambient temperatures (Ambient T° 46 °C).

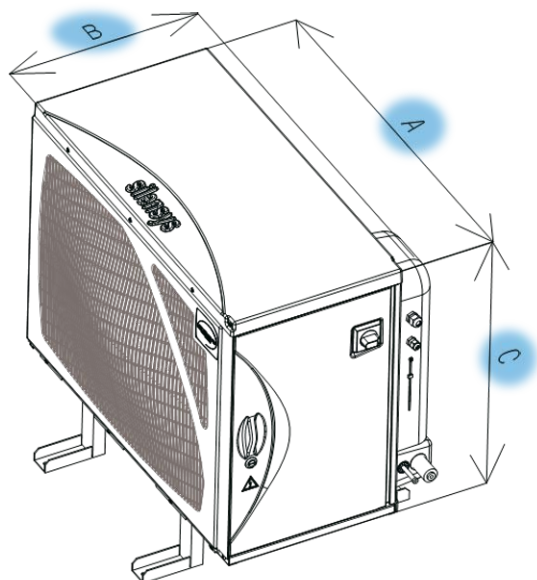

Tecumseh Europe: a commercial refrigeration specialist

A market leader in refrigeration & comfort cooling, Tecumseh Europe is part of the multinational Tecumseh Product Company. Tecumseh Europe designs and manufactures innovative compressors and condensing units specifically for commercial refrigeration applications. Currently, almost 25% of consumable food worldwide is wasted due to non respect of the cold chain. Based on this fact, Tecumseh offers high value-added products and a full product range.

■ Our values

For more than 77 years, Tecumseh's success has been based on shared company values:

- employees are our greatest asset
- a true customer service orientation
- the highest product quality & services
- perpetual technological innovation.

■ Tecumseh: People

This value comes from the professionalism of each employee, with strong technology, sales and industrial competency. Continuous training programs and internal promotion of talented employees guarantees a high level of commitment.

■ Tecumseh: Innovative products

Since 1934, Tecumseh has developed highly innovative products targeting high efficiency & high reliability.

Tecumseh in Europe is the only hermetic compressors manufacturers to provide a wide range of compressors in all three primary hermetic compressor technologies:

Reciprocating, Scroll & Rotary.

■ Tecumseh: Known worldwide

Several key brands names such as Unité Hermétique®, Silensys®, Masterflux®, Celseon®, and Vector® are supported by more than 1,000 sales representatives and authorized wholesale distributors.

■ Tecumseh: Full range of services

Tecumseh proposes full support from product selection, unit design, training, sales administration and technical support on site.

■ Tecumseh: Green technology

Conscious of the economic and ecological stakes of tomorrow, Tecumseh is committed to sustainable energy and efficiency development. Tecumseh follows ISO 14001 (environmental management system) as well as ISO 9001 (quality management process).

With more than 1,350 employees, Tecumseh Europe is delivering on the promise of innovation, product quality and value. Tecumseh is fully customer focused toward being the best global commercial refrigeration supplier today and into the future.

SALES AND MARKETING HEAD OFFICE

2, avenue Blaise Pascal
Site Prologis Bât. B
38090 Vaulx-Milieu
France
Tel. int +33 (0)4 74 82 24 00
Fax int +33 (0)4 74 82 24 99

GERMAN OFFICE

Ludwigstrasse 31
60327 Frankfurt am Main
Germany
Tel. int +49 (0)69 97 1454-0
Fax int +49 (0)69 72 41053

ITALIAN OFFICE

Via Parco Abbaziale, 6
10094 Giaveno (TO)
Italia
Tel. int +39 (0)11 937 98 61
Fax int +39 (0)11 937 83 88

SPANISH OFFICE

C/Corcega 301-303, 2º, 3a
08008 Barcelona
España
Tel. int +34 93 218 5708
Fax int +34 93 218 1691

BRITISH OFFICE

8 The Square, Stockley Park,
Uxbridge Middlesex UB11 1FW
United Kingdom
Tel. int +44 (0) 203 008 8565
Fax int +33 (0)4 74 82 24 94

MALAYSIAN OFFICE

N°18 Jalan Sultan Mohamed 4
Selat Klang Utara
42000 Port Klang
Selangor Darul Eshan
Malaysia
Tel. int +60 3 3176 3886
Fax int +60 3 3176 3890

