

:

T

SST  
SCT

**6F-40.2Y**

R404A

-35°C

45°C

3,3K


10K

400V-3-50Hz

5.00K

100%

(100%)

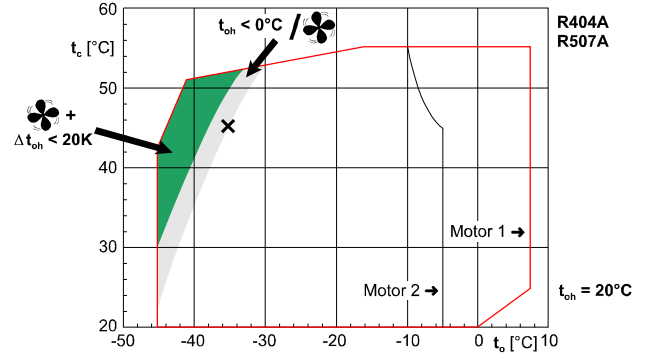

**6F-40.2Y-40P**

-	18.16 kW
- *	21.8 kW
-	17.35 kW
.	17.78 kW
(400V)	38.0 A
-	380-420V
-	34.8 kW
/	0.98
/ *	1.22
.	711 kg/h
	Standard
	94.6 °C



- ASERCOM

\* EN12900 ( . 20° , 0 )