



Version 5.3.2

18.12.2012 /

:

T

SST
SCT

.(

6F-40.2Y

R404A

-28°C

45°C

.) 0K

20K


Auto

400V-3-50Hz

100%

100%

(R404A/R507A)

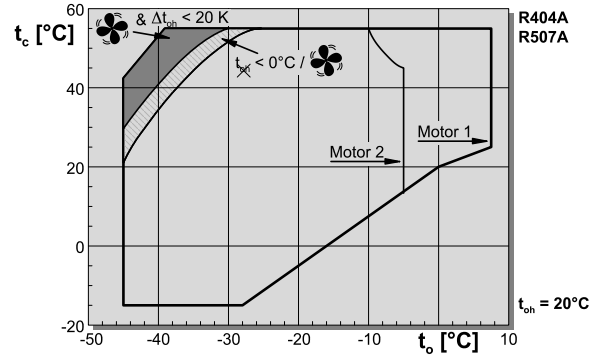

6F-40.2Y-40P

-	28.6 kW
- *	32.9 kW
-	28.6 kW
.	22.8 kW
(400V)	43.7 A
-	380-420V
-	51.5 kW
/	1.26
/ *	1.44
.	1039 kg/h
	Standard
	96.2 °C



ASERCOM

*

EN12900 (

20° ,

0)