


LINCO Spiral Chiller

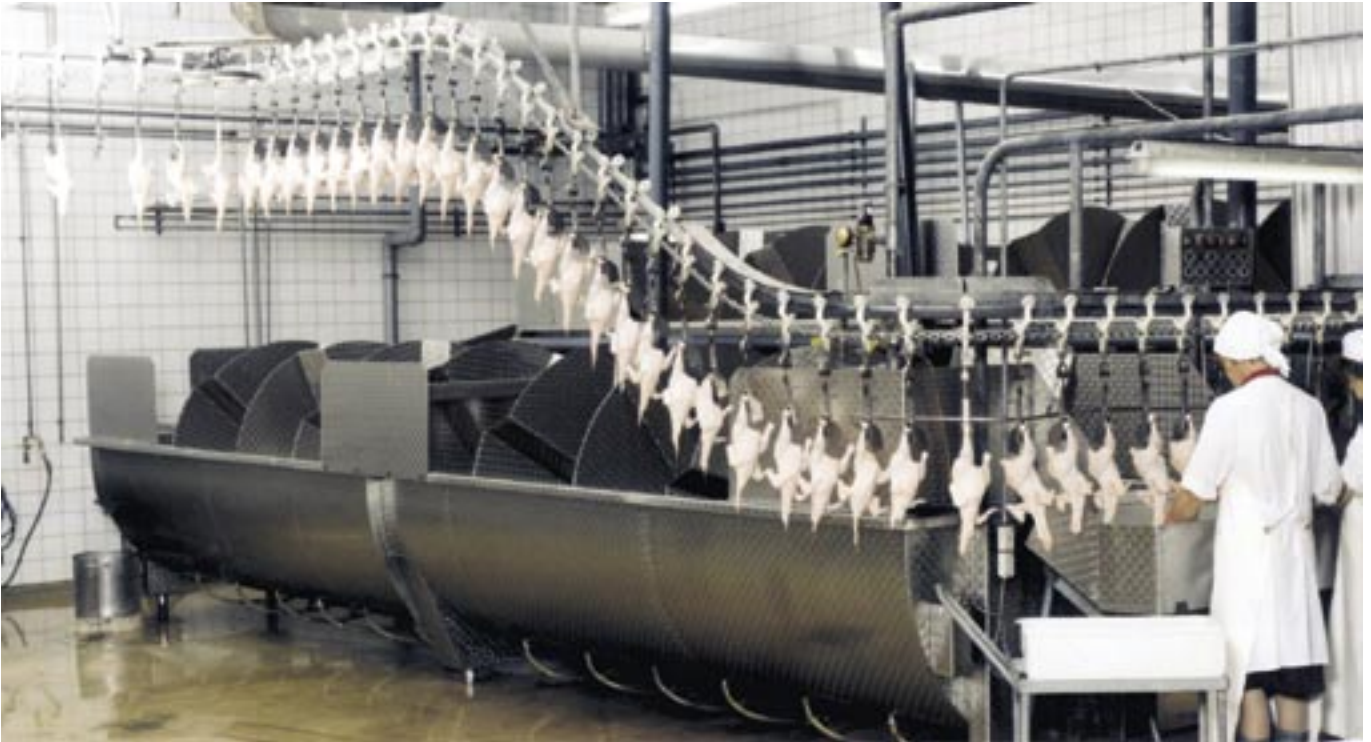

Advanced design, quality of manufacture and finish, and reliable, predictable performance make LINCO Chillers the top of the line.

Heavy gauge stainless steel construction including air agitation piping with heavy duty air blower (if required).

For smaller plants, a bulkhead can be built into the tank to make a separate washing section.

An electric gear motor with variable speed or a hydraulic motor with power pack drives the massive stainless shaft (which runs the entire length of the machine) through a heavy duty gearbox.



- *Virtually only one moving part*
- *Built to last*
- *Unique spiral design for improved agitation*
- *Variable speed*
- *Easy to clean*

TECHNICAL SPECIFICATION

Model/Type	Capacity Broilers *	Overall Dimension mm	Motor		Water		Air	Machine Weight kg	Crated Weight kg	Crated Cube m ³
			kW Hydraulic Electric	rpm	Connection: 2½-3" Pressure: 3.0 bar Temp.: 2-8° C		2½" bar			
					Contents cbm	Consumption litre/bird				
1200 3 m per extra m	375 125	L = 3000 Ø = 1400 H = 1025	1 x 1.1 1 x 0.25	1400 2800	1.8 0.6	2.5	200	800 120	NA	10.0 2.1
1600 3 m per extra m	600 200	L = 3000 Ø = 1800 H = 1225	1 x 1.1 1 x 0.25	1400 2800	3.0 1.0	2.5	200	1000 170	NA	12.0 3.2
2100 3 m per extra m	1155 385	L = 3000 Ø = 2300 H = 1475	1 x 1.1 1 x 0.25	1400 2800	5.1 1.7	2.5	200	1750 360	NA	20.0 5.3
2400 3 m per extra m	1500 500	L = 3000 Ø = 2600 H = 1625	1 x 1.1 1 x 0.25	1400 2800	6.9 2.3	2.5	200	2000 450	NA	26.0 6.7

All specifications are subject to future modifications.


*

Conditions:

Stay in chiller: 45 min.

Water/meat ratio: 4:1

Weight per bird: 1.2 kg

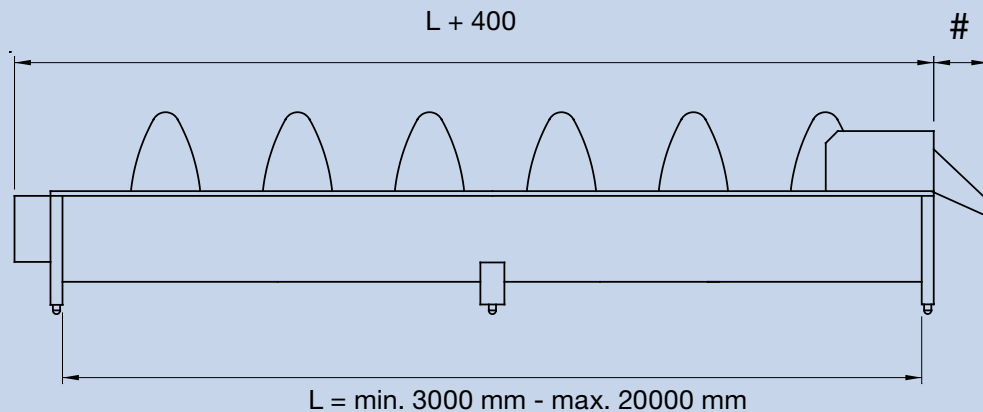

Length is variable – made according to customer request

R 000079 01 04