



Liebert
HIROSS

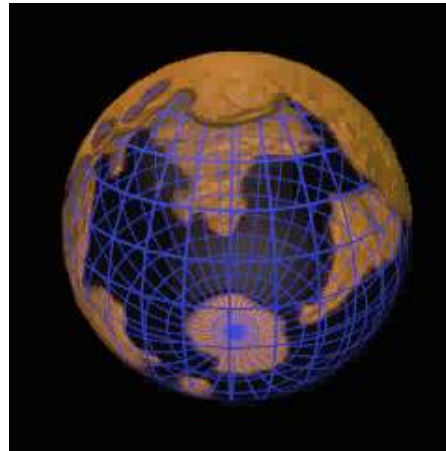


Liebert HIROSS Electronics
Supervision Systems

Range of on-board controls and supervision systems

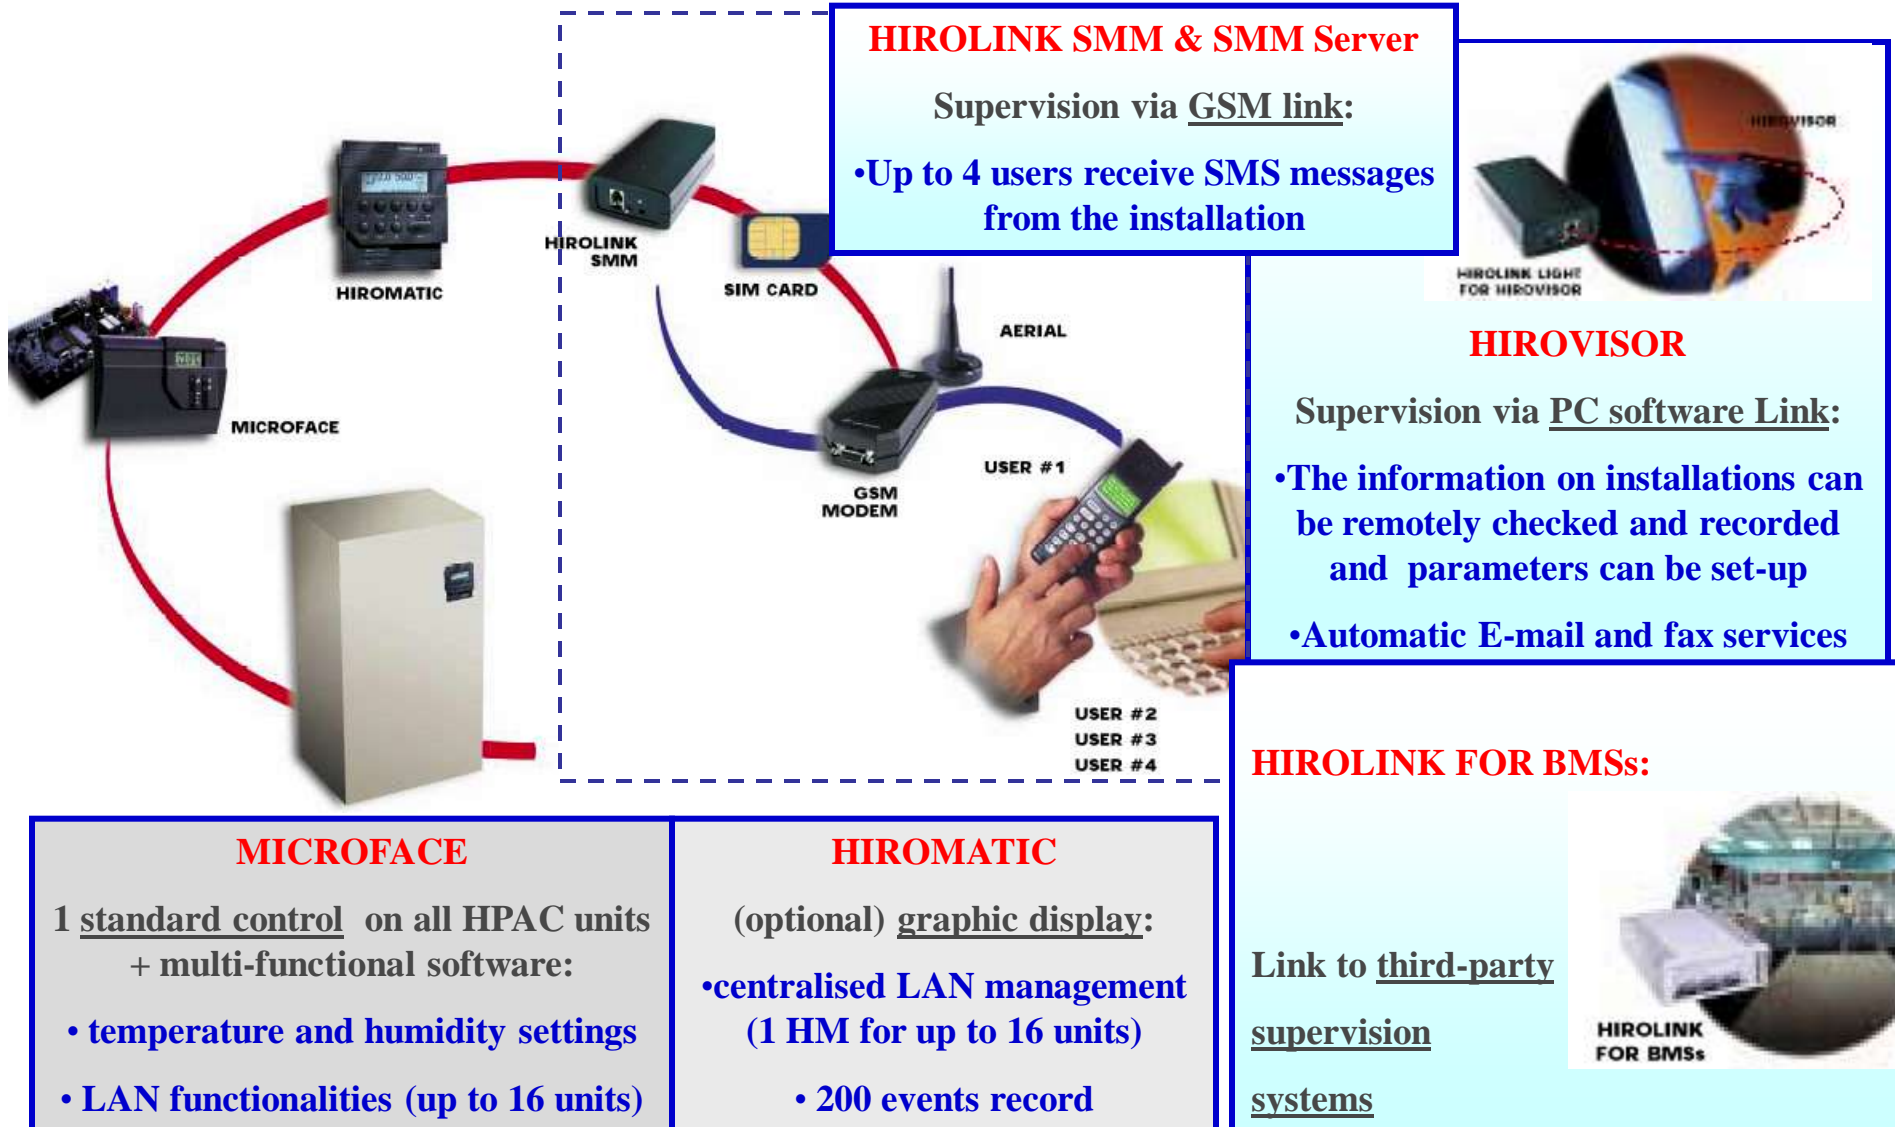

Liebert HIROSS GSM Supervising System


HIROLINK SMM

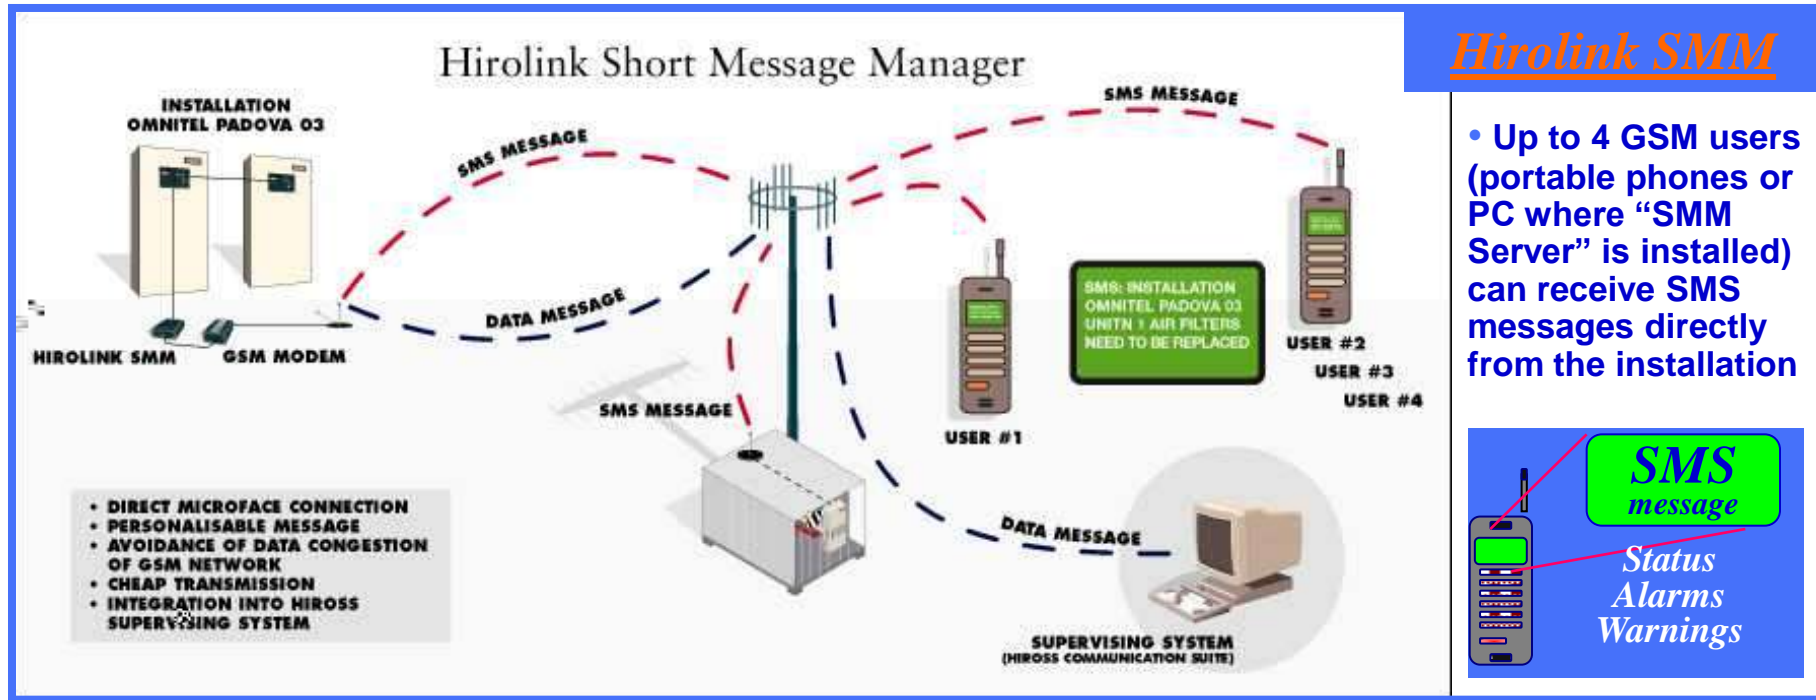

Allows distance monitoring 24 hours a day, 365 days per year - The units speak directly to you!

It is a simple and efficient distance monitoring system - you can intervene only if necessary.

SYSTEM architecture with Hirolink SMM

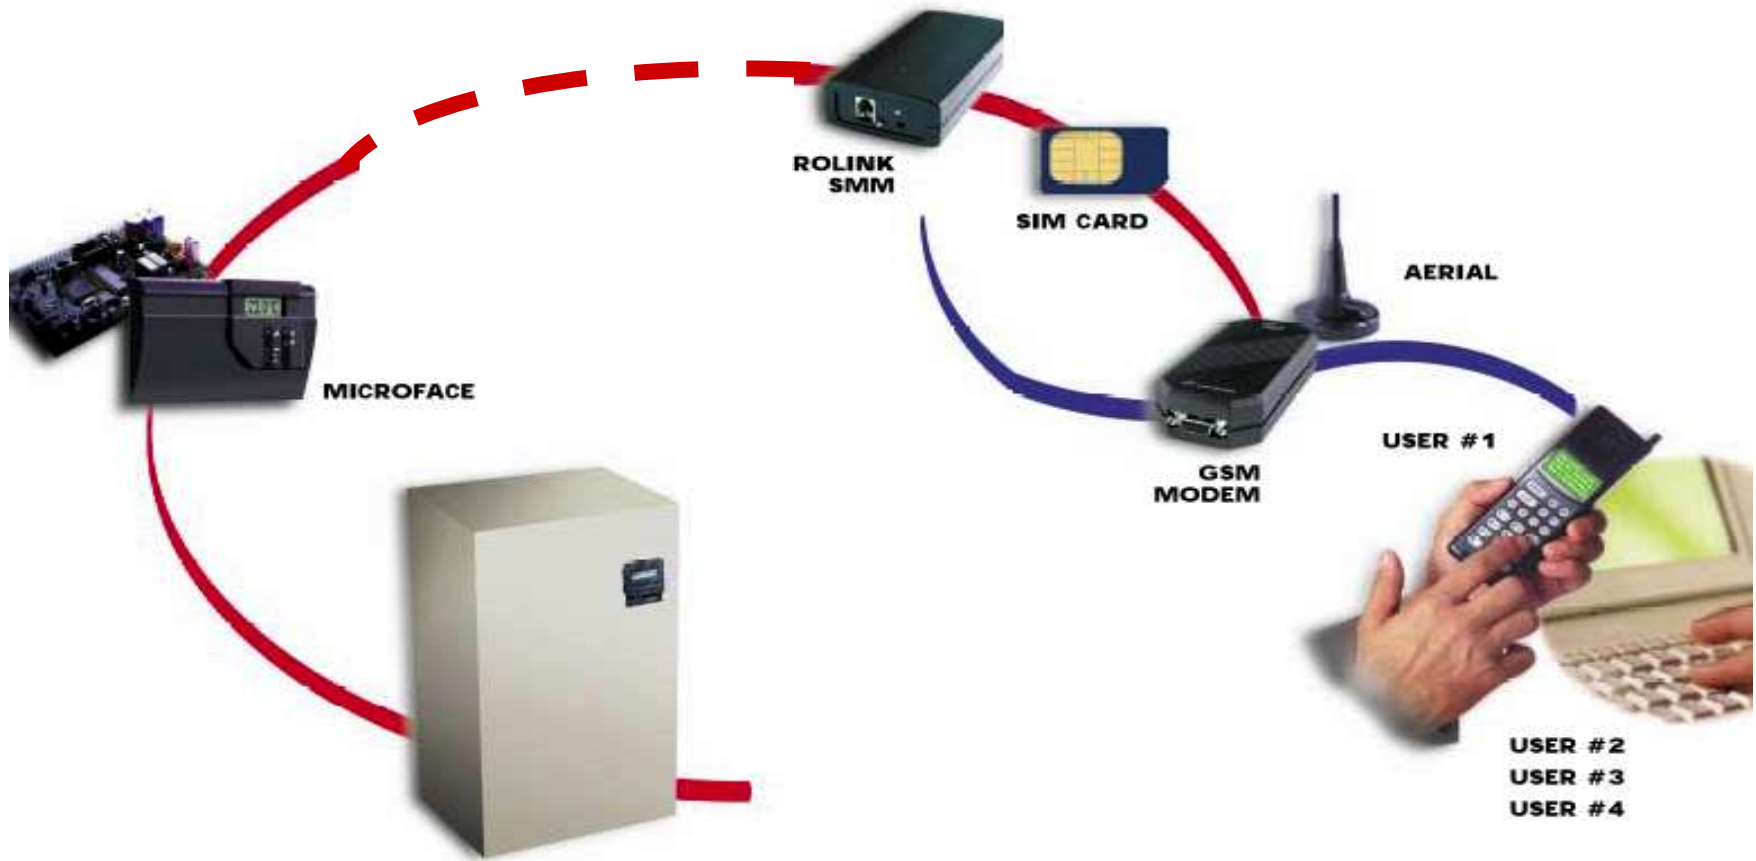

Structure



Liebert HIROSS Supervising System

Hirovisor is Liebert HIROSS supervision system on Personal Computer



It is a Windows NT-based PC software for continuous control of the installations from a Personal Computer.

It collects and records the installation information from Microface controls through Hiromatic Graphic and Hirolink

It allows distance units re-setting and parameters configuration

OR




Hirolink
CLASSIC

TELEMONITORING
TELEMAINTENANCE

Hirovisor 2000 includes the
TELEMAINTENANCE features:


- automatic e-mail (via Proxi Internet)
- automatic fax (via modem)

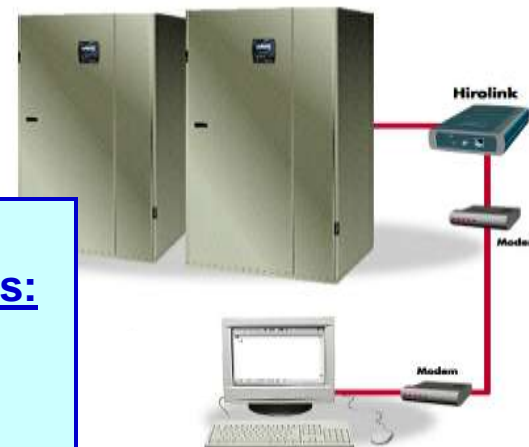

*Remote
supervision
(via RS232 or
via modem)*


Example of system architecture with Hiolink Classic for Hirovisor or BMSs

Structure

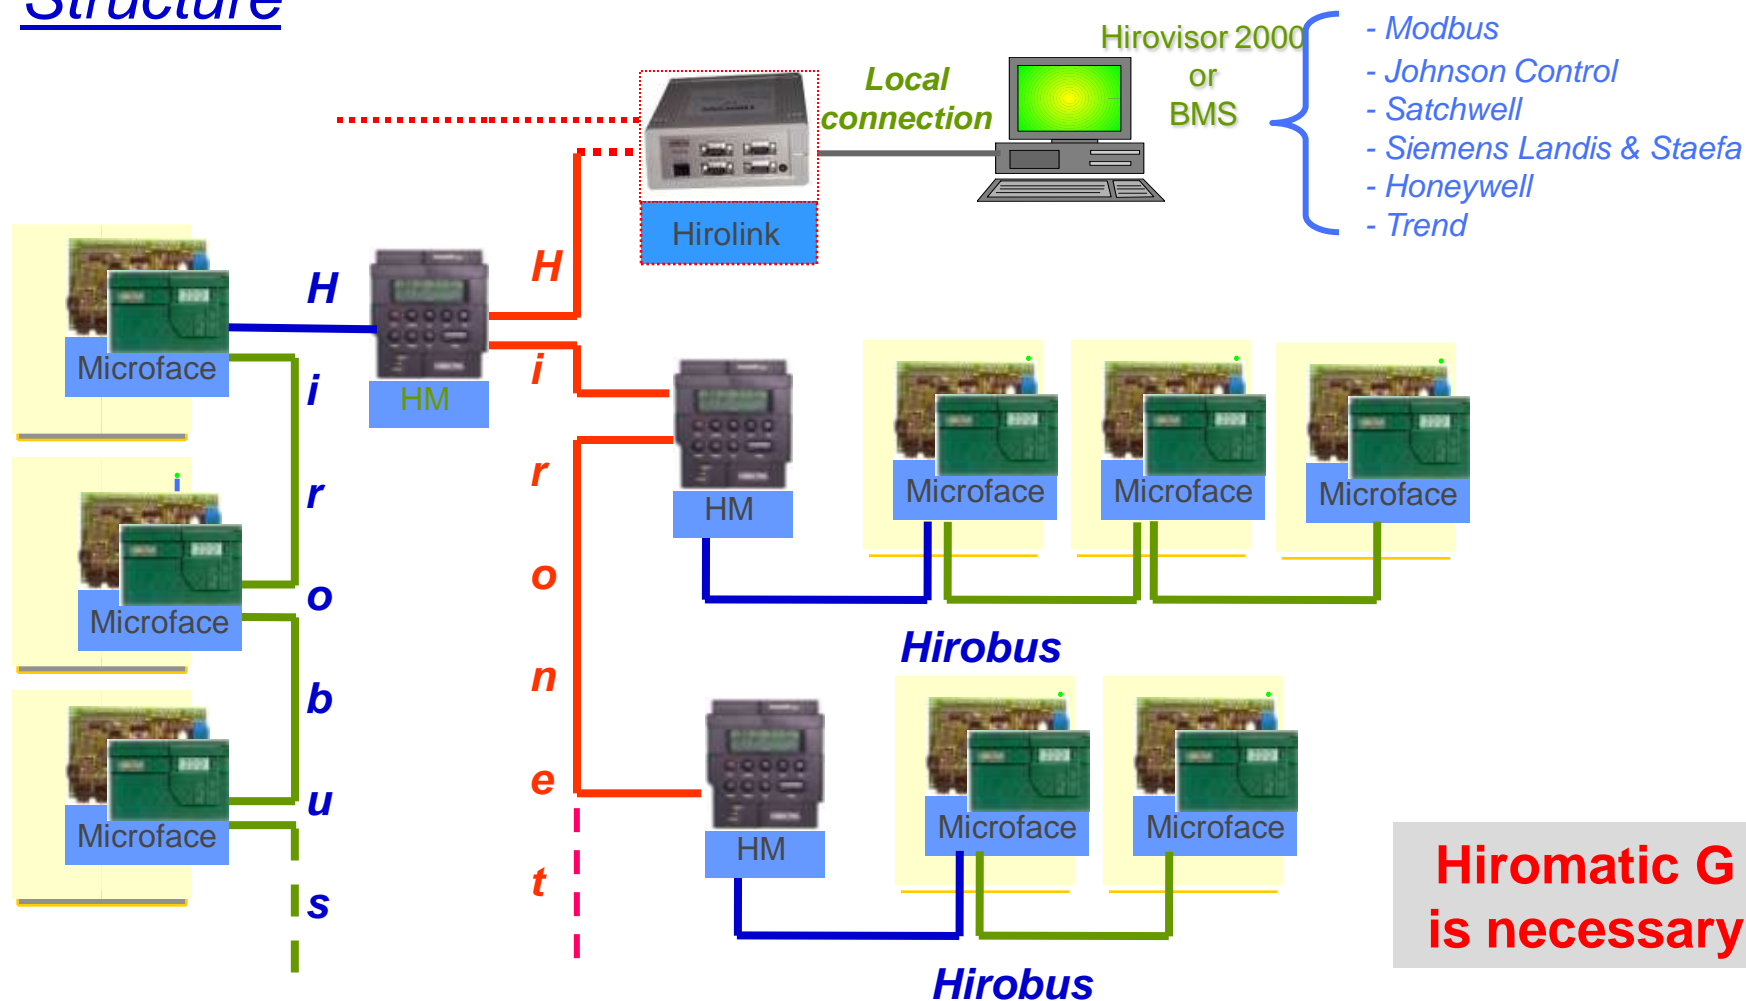


Example of system architecture Hirolink Light for Hirovisor

Structure

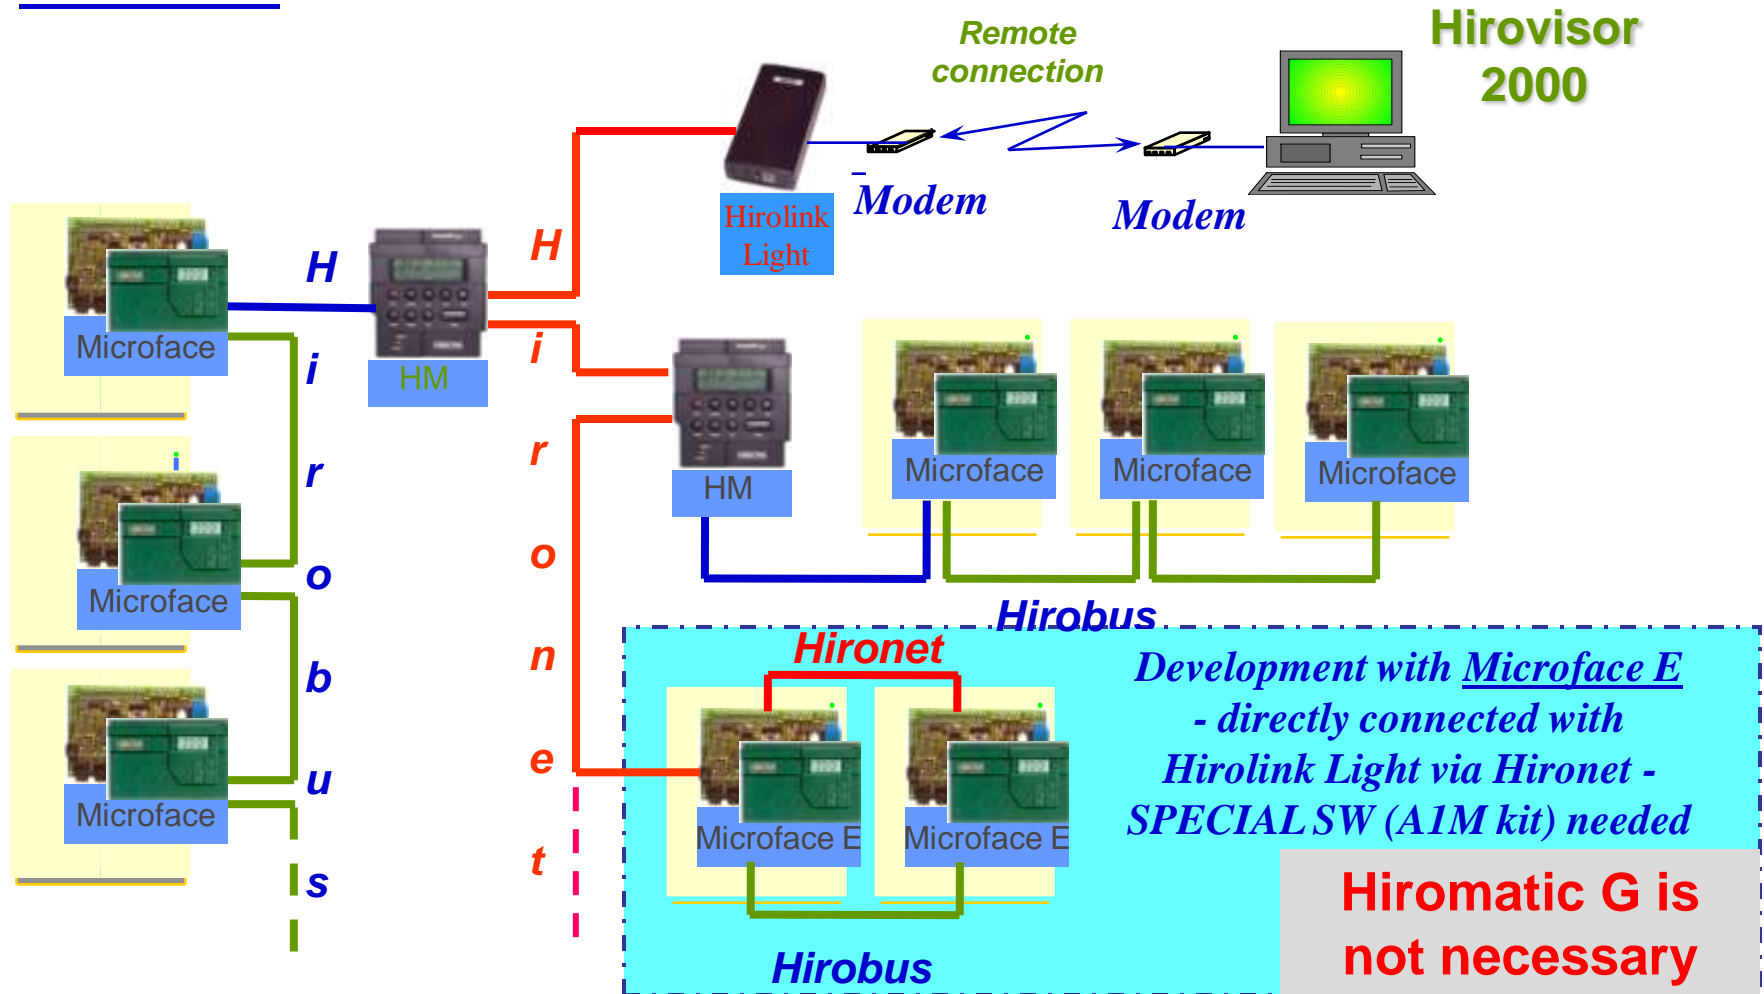

Example of system with Microface Evolution **without Hiromatic connection** (3 b)

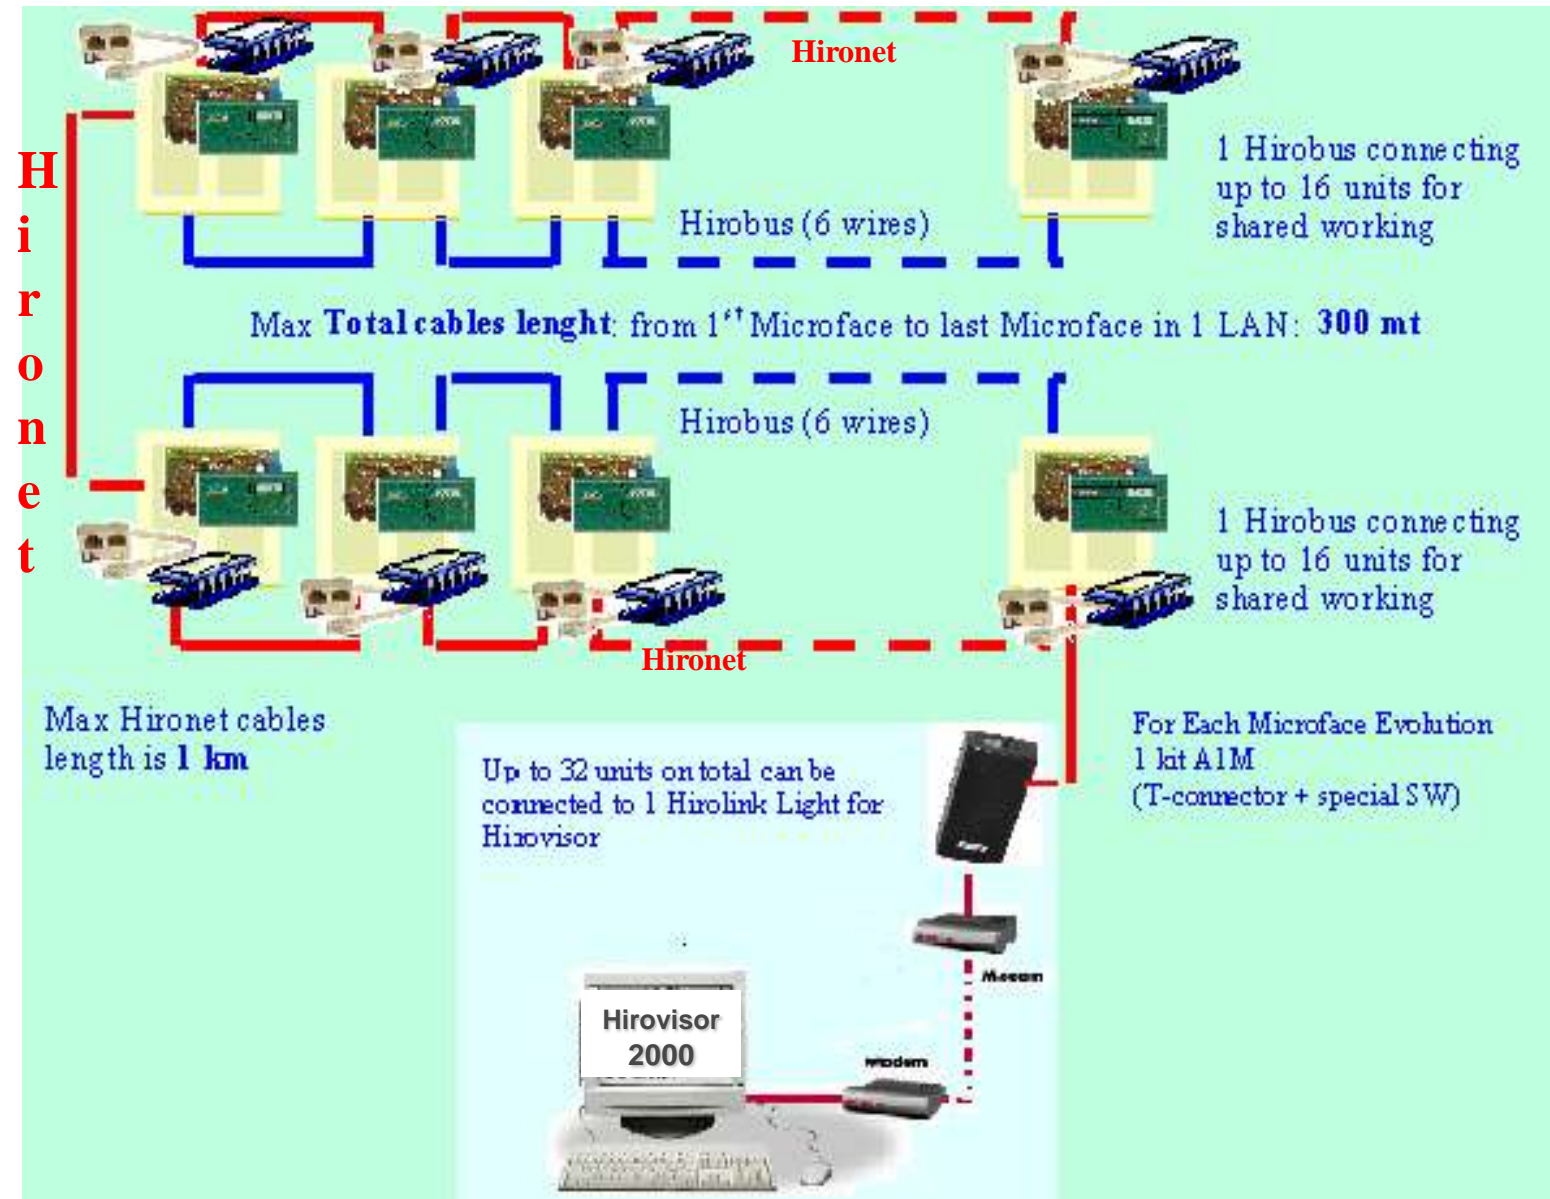



Connectivity - *the evolution*
The Intelligence of Flexibility