



Version 5.2

27.12.2011 /

:

(R404A/R507A)

6G-30.2Y

R404A

-35°C

45°C


5K

10K

400V-3-50Hz

100%

100%

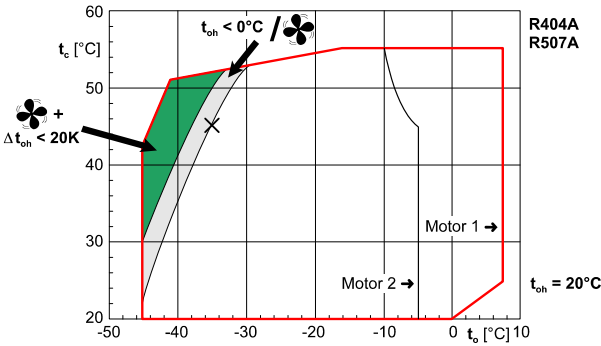

6G-30.2Y-40P

16.26 kW

18.89 kW

16.26 kW

15.24 kW

27.9 A

380-420V

30.1 kW

1.07

1.24

618 kg/h

Standard

93.5 °C



ASERCOM

EN12900 (

20° ,

0 )