



Version 5.2

to_Luchian

06.06.2010 /

1 / 2

R404A

43.0 kW

50 Hz / 400 V

2.0K

5.0K


100%

T	SST: SCT:	A				-	B				-
		-35.0°C 45.0°C					-35.0°C 40.0°C				
		Qo kW	Pe kW	COP W/W	%		Qo kW	Pe kW	COP W/W	%	
		34.4	35.6	0.97	80.0		40.7	35.5	1.15	94.6	
1	6F-40.2Y-40P	17.21	17.78	0.97	50.0		20.3	17.73	1.15	50.0	
2	6F-40.2Y-40P	17.21	17.78	0.97	50.0		20.3	17.73	1.15	50.0	

A:

!

A:

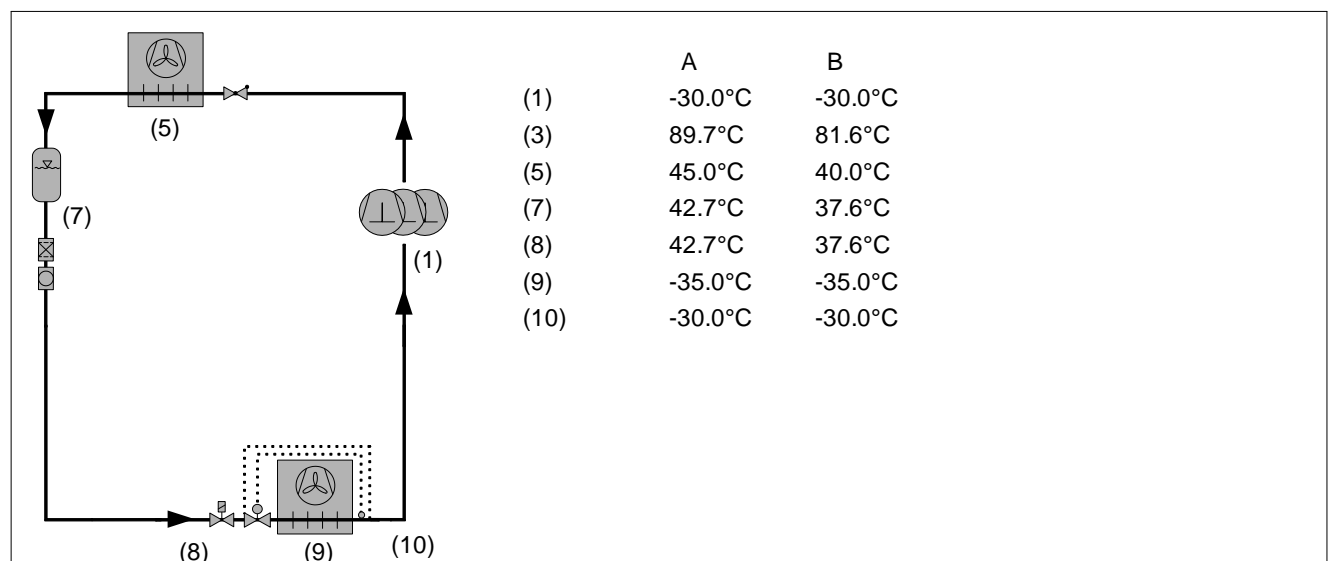



R404A

43.0 kW

50 Hz / 400 V

2.0K

5.0K

100%

T	SST: SCT:	A	B
		-35.0°C 45.0°C	-35.0°C 40.0°C
-	-	34.4 kW	40.7 kW
-	-	34.4 kW	40.7 kW
-	-	80.0 %	94.6 %
-	-	70.0 kW	76.1 kW
-	-	35.6 kW	35.5 kW
(400V)		75.9 A	75.8 A
/		0.97	1.15
		1447 kg/h	1558 kg/h
		89.7 °C	81.6 °C

A:

!

A:

,