



4TCS-12.2Y

R404A

, $t_o = -4 \text{ } ^\circ\text{C}$.

Version 5.3.1

04.05.2011 /

:

(R404A/R507A)

4TCS-12.2Y

R404A

-4°C

43°C


3K

10K

400V-3-50Hz

7.00K

100%

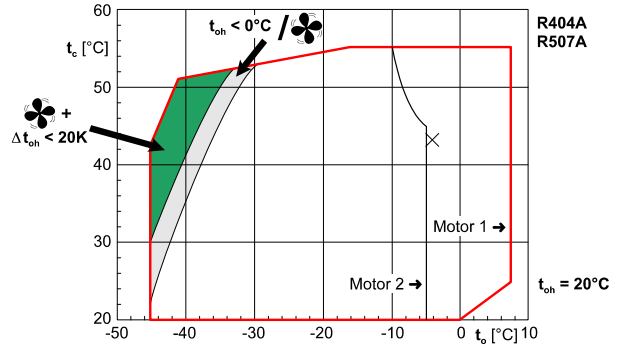

4TCS-12.2Y-40P

-	26.7 kW
- *	27.0 kW
-	26.0 kW
.	9.84 kW
(400V)	17.13 A
-	380-420V
-	35.3 kW
/	2.64
/ *	2.75
.	847 kg/h
	Standard
	68.5 °C



ASERCOM

* EN12900 (. 20° , 0)