



Version 5.3.2

03.08.2012 /

:

(R404A/R507A)

**6F-40.2Y**

R404A

-41.5°C

45°C

1K


10K

Auto

400V-3-50Hz

100%

100%

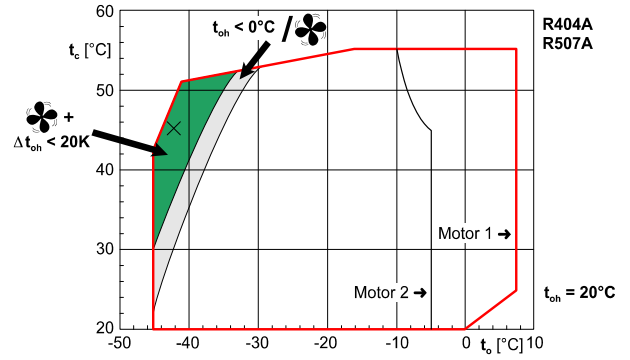

**6F-40.2Y-40P**

-	10.26 kW
- *	13.52 kW
-	10.26 kW
.	13.18 kW
(400V)	33.6 A
-	380-420V
-	23.4 kW
/	0.78
/ *	1.03
.	440 kg/h
	Standard
	106.4 °C



ASERCOM

\* EN12900 ( . 20° , 0 )